



BITUMEN & ASPHALT

Asphalt, also called bituminous conglomerate, is a fundamental material of road construction field. The main area of usage of bituminous mixtures is in road construction. Bituminous mixtures consist of essentially two ingredients, aggregate and binder. The major difference between asphalt and concrete is that bitumen and bituminous materials are used as binder in asphalt.

Due to the ever increasing intensity of today's traffic conditions there is a demand for higher levels of performance from roads. As a result, the testing of the asphalt needs to look not only at the constituent mix but the performance characteristics as well.

Analysis and design tests of bituminous mixtures, bitumen and bituminous tests, asphalt and road quality tests are provided for engineering firms and construction companies to produce, inspect and evaluate the paving materials to ensure the strength, physical and mechanical performance and durability towards safe application and use.

CONTENTS

| | | | |
|--|-----|---|-----|
| CENTRIFUGE EXTRACTORS..... | 74 | PRESSURE FILTER | 113 |
| REFLUX EXTRACTORS..... | 74 | BINDER RECOVERY APPARATUS, VACUUM PUMP METHOD..... | 114 |
| SOLVENT RECOVERY STILL..... | 75 | HOT EXTRACTION METHOD SOLUBLE BINDER CONTENT | 114 |
| LARGE SIZE HEAVY DUTY VACUUM PYKNOMETER (YALE PYKNOMETER)..... | 76 | HOT EXTRACTOR SET (PAPER FILTER METHOD)..... | 115 |
| CORE DRILLING MACHINE (Petrol Engine) | 77 | NON-NUCLEAR ASPHALT DENSITY GAUGE | 116 |
| CORE DRILLING MACHINE ON TRAILER (Petrol Engine)..... | 78 | NON-NUCLEAR ASPHALT DENSITY GAUGE, TOUCH SCREEEN..... | 117 |
| VIBRATING HAMMER..... | 79 | | |
| ASPHALT MIXERS..... | 80 | | |
| MANUAL MARSHALL COMPACTORS..... | 81 | | |
| AUTOMATIC MARSHALL COMPACTOR, EN | 81 | | |
| AUTOMATIC MARSHALL COMPACTOR, ASTM | 82 | | |
| MARSHALL MOULDS | 83 | | |
| UNIVERSAL EXTRUDER..... | 83 | | |
| MARSHALL STABILITY TEST MACHINE WITH LOAD RING | 84 | | |
| DIGITAL MARSHALL STABILITY TEST MACHINE | 85 | | |
| DIGITAL MARSHALL STABILITY TEST MACHINE (TOUCH SCREEN)..... | 86 | | |
| CBR & MARSHALL TESTING MACHINE WITH LOAD RING | 89 | | |
| CBR & MARSHALL & UNAXIAL TESTING MACHINE | 90 | | |
| CBR & MARSHALL & UNAXIAL TESTING MACHINE (TOUCH SCREEN) | 92 | | |
| WATER BATHS..... | 96 | | |
| BITUMEN PENETROMETER | 97 | | |
| AUTOMATIC BITUMEN PENETROMETER | 97 | | |
| BITUMEN OVEN FOR ROLLING THIN-FILM OVEN TEST (RTFOT)..... | 99 | | |
| BITUMEN OVEN FOR THIN-FILM OVEN & LOSS ON HEATING TEST (TFOT)..... | 100 | | |
| WATER IN BITUMINOUS MATERIALS TEST SET (DEAN-STARK METHOD)..... | 100 | | |
| ABA - ASPHALT BINDER ANALYZER | 101 | | |
| DUCTILITY TESTING MACHINE | 102 | | |
| AUTOMATIC RING AND BALL SOFTENING POINT APPARATUS | 103 | | |
| RING AND BALL SOFTENING POINT APPARATUS | 104 | | |
| RATE OF SPREAD SPRING BALANCE..... | 105 | | |
| APPARATUS FOR DISTILLATION OF CUT-BACK ASPHALT | 105 | | |
| CLEVELAND FLASH AND FIRE POINT TESTER..... | 106 | | |
| TAG CLOSED-CUP FLASH POINT TESTER | 106 | | |
| SAYBOLT VISCOMETER | 107 | | |
| ENGLER VISCOMETER | 107 | | |
| AUTOGRAPHIC RECORDING TRAVELLING BEAM DEVICE..... | 108 | | |
| SOLUBILITY TEST SET..... | 109 | | |
| MOT STRAIGHT EDGE | 109 | | |
| BENKELMAN BEAM DEVICE..... | 110 | | |
| PLATE BEARING EQUIPMENT | 110 | | |
| ASPHALT MIXTURE MAXIMUM THEORY DENSITY METER..... | 111 | | |
| VIALIT PLATE (BINDER ADHESION) TEST | 112 | | |
| DEPOT TRAY TEST SET | 112 | | |
| BOTTLE ROLLER APPARATUS | 113 | | |

HİRA TESTING EQUIPMENT

CENTRIFUGE EXTRACTORS

STANDARDS: EN 12697-1 Clause B.1.5; EN 13108, ASTM D2172, AASHTO T164 A

Used for the determination of bitumen percentage in bituminous mixtures.

It consists of a removable precision machined rotor bowl, housed in a cylindrical aluminum box.

They are driven by an electric motor fitted with AC drive (inverter) with the double function of speed control up to 3600 rpm. Regardless of the frequency (50 or 60 Hz) and electrical breaking.

The centrifuge can be set for the automatic speed ramp up to 3600 rpm and will stop in 10-15 seconds.

The control panel includes: Start/Stop button and speed control knob.

Two models are available with 1500 g and 3000 g capacity.

The Centrifuge Extractors are supplied with aluminum Bowl and Cover and Filter Papers.



HR-AS1505

Technical Specifications:

| Product Code | Product Name | Capacity (lt) | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|----------------------|---------------|-----------------|-------------|-----------------------|
| HR-AS1500 | Centrifuge Extractor | 1500 | 65x45x55 | 35 | 220 V, 50-60 Hz, 1 ph |
| HR-AS1505 | Centrifuge Extractor | 3000 | 65x45x55 | 35 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS1500/1 | Filter Paper for HR-AS1500 (Pack of 50) |
| HR-AS1500/2 | Rotating Bowl and Cover for HR-AS1500 |
| HR-AS1505/1 | Filter Paper for HR-AS1505 (Pack of 50) |
| HR-AS1505/2 | Rotating Bowl and Cover for HR-AS1505 |



HR-AS1505/1

REFLUX EXTRACTORS

STANDARDS: ASTM D2172, AASHTO T 164-B

Used for the quantitative determination of bitumen in hot-mixed paving mixtures and pavement samples. The bitumen content is calculated by difference from the weight of extracted aggregates, moisture content and ash from aliquot part of the extract.

The Reflux Extractor is available in two, 1000 g and 4000 g capacity models.

The apparatus comprises a cylindrical glass jar, two wire mesh cones with interlocking frames, a water condenser with inlet/outlet tubes, hot plate and 50 filter papers.



HR-AS1525/4



HR-AS1525

Technical Specifications:

| Product Code | Product Name | Capacity (gr) | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|------------------------------------|---------------|-----------------|-------------|-----------------------|
| HR-AS1520 | Reflux Extractor Test Set, 1000 gr | 1000 | 26x26x62 | 10 | 220 V, 50-60 Hz, 1 ph |
| HR-AS1525 | Reflux Extractor Test Set, 4000 gr | 4000 | 26x26x62 | 12 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Capacity (gr) | Dimensions (cm) | Weight (kg) |
|--------------|---|---------------|-----------------|-------------|
| HR-AS1520/1 | Reflux Extractor Glass Jar | 1000 | Ø 15 x 46 | 6 |
| HR-AS1520/2 | Reflux Extractor Condenser | 1000 | --- | --- |
| HR-AS1520/3 | Reflux Extractor Wire Mesh Cone | 500 | --- | --- |
| HR-AS1520/4 | Filter Paper (pack of 50) | --- | Ø 30 | --- |
| HR-AS1520/5 | Iron Wire Gauze for HR-AS1520 | --- | 12x12 | --- |
| HR-AS1525/1 | Reflux Extractor Glass Jar | 4000 | Ø 22 x 46 | 8 |
| HR-AS1525/2 | Reflux Extractor Condenser | 4000 | --- | --- |
| HR-AS1525/3 | Reflux Extractor Wire Mesh Cone | 2000 | --- | --- |
| HR-AS1525/4 | Filter Paper (pack of 50) | --- | Ø 40 | --- |
| HR-AS1525/5 | Iron Wire Gauze for HR-AS1525 | --- | 16x16 | --- |
| HR-G1010 | Single Hot Plate. Thermostat Controlled | --- | 30x30x20 | 2,5 |

SOLVENT RECOVERY STILL

The efficient and compact unit, easy to install, is totally self-contained. It is provided of two tanks: one for the clean solvent and one for the dirty solvent and of a water coolant system which only needs to be connected to a water tap.

The inside of the containers are stainless steel for low corrosion and long life time. Two liquid levels to see the volume of clean and dirty solvents.

Capacity is 10 liters/h.

Electrical heater and water cooling system.

Supplied with 10m plastic tube, tube clamps, sieve insert 0.6 mm opening and one lid.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|------------------------|-----------------|-------------|-----------------------|
| HR-AS1535 | Solvent Recovery Still | 32x40x65 | 25 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Power Supply |
|--------------|----------------------|-----------------------|
| HR-AS1535/1 | Circulation Pump | 220 V, 50-60 Hz, 1 ph |
| HR-AS1535/2 | Plastic Water Bucket | --- |



HR-AS1535

HIRA TESTING EQUIPMENT

LARGE SIZE HEAVY DUTY VACUUM PYKNOMETER (YALE PYKNOMETER)

THEORETICAL MAXIMUM SPECIFIC GRAVITY OF UNCOMPACTED BITUMINOUS PAVING MIXTURES (RICE-TEST)

STANDARDS: ASTM D2041, EN 12697-5, EN 13108, AASHTO T209, T283

It is utilized for a rapid determination of asphalt content, bulk specific gravity of aggregates and the maximum theoretic specific gravity of bituminous uncompact road mixtures and the percent air voids in compacted mixtures.

There are two models of Vacuum Pyknometer as Stainless Steel or Transparent made. Both of models are supplied with Transparent Plexiglas cover, valve and gauge.

Complete With Vacuum Pyknometer, Vibro-Deaerator, Vacuum Pump, 1,5 m tubing for vacuum, Vacuum Gauge and Filter Flask 250 ml.

Vibro-Deaerator is time controlled. To vibrate the pyknometer for the evacuation for the air. This unit can be used also as a sieve shaker.

Vacuum Pump is Portable, oil type, complete with 1,5 m tubing for vacuum.

Air Drying Unit and Silica Gel should be ordered separately.



HR-AS1550/2



HR-AS1560/1

Technical Specifications:

| Product Code | Product Name | Capacity (lt) | Dimensions (cm) | Weight (kg) | Power Supply |
|----------------|---|---------------|-----------------|-------------|--------------------|
| HR-AS1550 | Vacuum Pyknometer Test Set, Stainless Steel | 10 lt | 51x51x82 | 40 | 220 V, 50 Hz, 1 ph |
| HR-AS1550/60Hz | Vacuum Pyknometer Test Set, Stainless Steel | 10 lt | 51x51x82 | 40 | 220 V, 60 Hz, 1 ph |
| HR-AS1560 | Vacuum Pyknometer Test Set, Transparent | 10 lt | 51x51x82 | 35 | 220 V, 50 Hz, 1 ph |
| HR-AS1560/60Hz | Vacuum Pyknometer Test Set, Transparent | 10 lt | 51x51x82 | 35 | 220 V, 60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Capacity | Dimensions (cm) | Weight (kg) | Power Supply |
|---------------|------------------------------------|-------------------|-----------------|-------------|-----------------------|
| HR-AS1550/1 | Vacuum Pyknometer, Stainless Steel | 10 lt | Ø 30 x 45 | 8 | --- |
| HR-AS1560/1 | Vacuum Pyknometer, Transparent | 10 lt | Ø 30 x 45 | 5 | --- |
| HR-G0500 | Vibro-Deaerator | --- | 51x51x37 | 24 | 220 V, 50 Hz, 1 ph |
| HR-G0500/60Hz | Vibro-Deaerator | --- | 51x51x37 | 24 | 220 V, 60 Hz, 1 ph |
| HR-G0800 | Vacuum Pump | 51 lt/min. - 2 Pa | 29x13x23 | 6,6 | 220 V, 50-60 Hz, 1 ph |
| HR-G0815 | Tubing for Vacuum | 1,5 m | --- | --- | --- |
| HR-G0816 | Vacuum Gauge Manometer | 1000 mbar | Ø 6,3 | 0,15 | --- |
| HR-G0080 | Filter Flask | 250 ml | 19x19x31 | 0,2 | --- |
| HR-AS1550/2 | Air Drying Unit | 500 g | --- | --- | --- |
| HR-G0935 | Silica Gel, 1 kg | 1 kg | --- | 1 | --- |

CORE DRILLING MACHINE (PETROL ENGINE)

STANDARDS: EN 12697-27

Compact and portable HR-AS1575 Core Drilling Machine is designed to cut cores up to 150 mm diameter from concrete, asphalt and similar hard construction materials.

These drilling machines are extremely robust, heavy duty, compact and reliable. The sliding group is rectified so as to assure a very soft and accurate drilling movement.

Built in water swivel to cool the diamond bit.

The robust steel base is equipped with wheels for easy site displacements, together with four levelling and stabilizing feet.

All working and moving parts are plated for rust protection.

The motor assembly comprises a 6.5 hp petrol engine. A ball screw mechanism enables close control of the drilling pressure and rapid return when drilling is completed.

The machine comprises a vertical support column which carries the drill head/ motor assembly.

The equipment is supplied complete with base unit, motor swivel attachment.

Strap wrench, Spanner, s and Core Extractors should be ordered separately.



HR-AS1575



HR-AS1607

HR-AS1606



HR-AS1603

HR-AS1602

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--------------------------|-----------------|-------------|
| HR-AS1600 | Core Bit, Ø 50 mm | Ø 5 x 45 | 2 |
| HR-AS1601 | Core Bit, Ø 75 mm | Ø 7,5 x 45 | 2,5 |
| HR-AS1602 | Core Bit, Ø 100 mm | Ø 10 x 45 | 3 |
| HR-AS1603 | Core Bit, Ø 150 mm | Ø 15 x 45 | 5 |
| HR-AS1606 | Core Extractor, Ø 100 mm | 30x25x25 | 2 |
| HR-AS1607 | Core Extractor, Ø 150 mm | 30x25x25 | 3 |
| HR-G0780 | Strap wrench | --- | --- |
| HR-G0781 | Spanner | --- | --- |

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Engine Power (hp) |
|--------------|---------------------------------------|-----------------|-------------|-------------------|
| HR-AS1575 | Core Drilling Machine (Petrol Engine) | 50x85x120 | 105 | 6,5 |

HİRA TESTING EQUIPMENT

CORE DRILLING MACHINE ON TRAILER (PETROL ENGINE)

STANDARDS: EN 12697-27

Core Drilling Machine on trailer is designed to cut cores up to 150 mm diameter from asphalt, concrete and other similar hard construction material.

These drilling machines are extremely robust, heavy duty, compact and reliable. The sliding group is rectified so as to assure a very soft and accurate drilling movement.

Built in water swivel to cool the diamond bit.

The machine comprises a vertical support column which carries the drill head/ motor assembly.

All working and moving parts are plated for rust protection.

The motor assembly comprises a 6.5 Hp petrol engine. A ball screw mechanism enables close control of the drilling pressure and rapid return when drilling is completed.

The drilling machine is installed in a trailer for fast and precise sampling on-site. 100 lt water tank provides continuous spraying during drilling to protect diamond core. The two-wheeler taut liner trailer is fully equipped with brake lamps/hazard flashers/retro reflectors conforming to road traffic regulations. The trailer is designed with a space to be used for storing the core samples. The two fixing legs are robustly designed for improved stabilization.

Strap wrench, Spanner, Core Bits and Core Extractors should be ordered separately.

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--------------------------|-----------------|-------------|
| HR-AS1600 | Core Bit, Ø 50 mm | Ø 5 x 45 | 2 |
| HR-AS1601 | Core Bit, Ø 75 mm | Ø 7,5 x 45 | 2,5 |
| HR-AS1602 | Core Bit, Ø 100 mm | Ø 10 x 45 | 3 |
| HR-AS1603 | Core Bit, Ø 150 mm | Ø 15 x 45 | 5 |
| HR-AS1606 | Core Extractor, Ø 100 mm | 30x25x25 | 2 |
| HR-AS1607 | Core Extractor, Ø 150 mm | 30x25x25 | 3 |
| HR-G0780 | Strap wrench | --- | --- |
| HR-G0781 | Spanner | --- | --- |



HR-AS1606



HR-AS1607

HR-AS1603



HR-AS1602

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Engine Power (hp) |
|--------------|----------------------------------|-----------------|-------------|-------------------|
| HR-AS1580 | Core Drilling Machine On Trailer | 160x260x200 | 290 | 6,5 |

VIBRATING HAMMER

STANDARDS: EN 12697-9, 12697-10, 12697-32, BS 598:10, BS 1377:4, 1924:2

The HR-AS2335 Vibratory Compactor Set is used to prepare the moulded test specimens of bituminous mixtures in loose state by using the vibratory compaction technique. Such specimens are used to determine maximum density as described EN 12697- 5, bulk density as described in EN 12697-6, void characteristics as described in EN 12697-8, reference density as described in EN 12697-9 or compactability as described in EN 12697-10 for a bituminous mixtures.

The HR-AS2335 Vibratory Compactor Set consists of a Vibrating Hammer, Supporting Frame, Small and Large Tamping Foots and 300 mm Shank.

P.R.D.(percentage refusal density) Split mould is vertically split on one side, foreseen of clamp attachment to the base plate, plated against corrosion, is utilized for determining the degree of compaction of bituminous pavements, for quality control purpose.

The split mould and base plate should be ordered separately.

The set is also used for compaction of proctor and CBR soil specimens.

Vibrating Hammer has double insulated motor, trigger handle, for asphalt compaction in percentage refusal density test.

Supporting Frame for Vibrating Hammer; the sliding mass has a total weight (including hammer and tamping foot) of 37 kg as requested by EN standards. Steel made, plated against corrosion.



Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|-------------------------|-----------------|-------------|----------------------|
| HR-AS2335 | Vibratory Compactor Set | 51x30x112 | 75 | 220 V, 50-60 Hz, 1ph |



HR-AS2335/3

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--|-----------------|-------------|----------------------|
| HR-AS2335/1 | Vibrating Hammer | 11x43x27 | 7 | 220 V, 50-60 Hz, 1ph |
| HR-AS2335/2 | Supporting Frame for Vibrating Hammer | 51x30x112 | 45 | --- |
| HR-AS2335/3 | P.R.D.(Percentage Refusal Density) Split Mould | Ø 10 x 15 | 12 | --- |
| HR-AS2335/4 | Small Tamping Foot, Ø 102 mm | Ø 10,2 | --- | --- |
| HR-AS2335/5 | Large Tamping Foot, Ø 146 mm | Ø 14,6 | --- | --- |
| HR-AS2335/6 | Shank, 300 mm Long for Tamping Foot | 30 | --- | --- |

ASPHALT MIXERS

STANDARDS: EN 12697-35

This mixers has been designed to mix bituminous samples for compaction tests, Marshall and tensile splitting test and for other tests where uniformity is required.

Thanks to the planetary action this mixer ensures a complete and uniform mixing.

The machine is provided with a variable speed drive allowing to set a wide range of speeds.

A timer allows to select the mixing time or the continuous mixing.

The bituminous mix must be prepared at prescribed temperature for this reason the mixer can equipped with thermostatically controlled heater.

The mixer is supplied complete with suitable capacity bowl and the beater.

Electric heater should be ordered separately.



HR-AS1625/1



HR-AS1625

Technical Specifications:

| Product Code | Product Name | Capacity (lt) | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|---------------|---------------|-----------------|-------------|-----------------------|
| HR-AS1625 | Asphalt Mixer | 5 | 30x55x65 | 55 | 220 V, 50-60 Hz, 1 ph |
| HR-AS1630 | Asphalt Mixer | 10 | 70x75x80 | 75 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Capacity (lt) | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|-------------------------------|---------------|-----------------|-------------|-----------------------|
| HR-AS1625/1 | Bowl for HR-AS1625 | 5 | --- | --- | --- |
| HR-AS1625/2 | Beater for HR-AS1625 | --- | --- | --- | --- |
| HR-AS1625/3 | Electric Heater for HR-AS1625 | --- | Ø 25x30 | 5 | 220 V, 50-60 Hz, 1 ph |
| HR-AS1630/1 | Bowl for HR-AS1630 | 10 | --- | --- | --- |
| HR-AS1630/2 | Beater for HR-AS1630 | --- | --- | --- | --- |
| HR-AS1630/3 | Electric Heater for HR-AS1630 | --- | Ø 30x35 | 7 | 220 V, 50-60 Hz, 1 ph |



HR-AS1630



HR-AS1630/2



HR-AS1630/1



HR-AS1630/3

MANUAL MARSHALL COMPACTORS

STANDARDS: ASTM D6926, D5581, AASHTO T245 (for HR-AS1700)

Manual Marshall Compactor is used to compress the Marshall samples manually.

The trip mechanism is arranged so that the sliding hammer falls at the same distance for every blow.

Manual Marshall Compactor is used to compact Marshall Specimens with hand, manually. The sliding weight is 4536 ± 9 gr and dropped by the user from a height of 457 ± 3 mm manually.

The assembly consists of a compaction hammer, wooden compaction pedestal, support rod to hold the hammer in perpendicular position and mould holder.


2 models are available. HR-AS1700 is used for 4" diameter moulds and HR-AS1705 is used for 6" diameter moulds.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|------------------------------------|-----------------|-------------|
| HR-AS1700 | Manual Marshall Compactor Set (4") | 35x40x160 | 50 |
| HR-AS1710 | Manual Marshall Compactor Set (6") | 35x40x160 | 56 |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|---------------------------------|-----------------|-------------|
| HR-AS1700/1 | Compaction Hammer for HR-AS1700 | 10x10x11 | 8 |
| HR-AS1701 | Wooden Compaction Pedestal | 35x40x160 | 42 |
| HR-AS1705 | Compaction Hammer (BS) | 10x10x11 | 8 |
| HR-AS1710/1 | Compaction Hammer for HR-AS1710 | 10x10x11 | 14 |

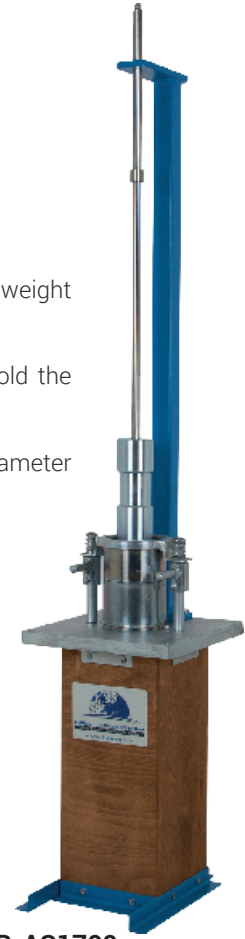

HR-AS1700

AUTOMATIC MARSHALL COMPACTOR, EN

STANDARDS: EN 12697-10, EN 12697-30

This ruggedly constructed machine has been designed to eliminate the laborious process of hand compaction.

The apparatus automatically compacts the sample and stops after the preset number of blows.

The mould is held in position by a quick and practical clamping device. The trip mechanism is arranged so that the sliding hammer falls at the same distance for every blow. The compactor includes the laminate hardwood block and vibrated concrete base $45 \times 45 \times 20$ cm.

All moving parts are protected with safety guard, which stops automatically the compactor when opened, and the control panel is fit with an emergency stop red button, all conforming to CE prescriptions.

The drive mechanism lifts the $4550 \text{ g} \pm 20$ gr compaction hammer, plated against corrosion, to the height of $460 \text{ mm} \pm 3$ mm allows free fall.

Soundproof Safety Cabinet is available as optional and should be ordered separately.

Technical Specifications:

| Product Code | HR-AS1750 | HR-AS1750/60Hz |
|-------------------------|------------------------------|--------------------|
| Product Name | Automatic Marshall Compactor | |
| Blows frequency | 50 blows in 55/60 s | |
| Sliding mass weight (g) | 4535 ± 15 | |
| Free fall height (mm) | 457 ± 5 | |
| Overall dimensions (cm) | $55 \times 192 \times 55$ | |
| Weight (kg) | 265 | |
| Power Supply | 220 V, 50 Hz, 1 ph | 220 V, 60 Hz, 1 ph |



HR-AS1750

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---------------------------|
| HR-AS1750/1 | Soundproof Safety Cabinet |

HİRA TESTING EQUIPMENT

AUTOMATIC MARSHALL COMPACTOR, ASTM

STANDARDS: ASTM D1559, ASTM D 6926, AASHTO T245

This ruggedly constructed machine has been designed to eliminate the laborious process of hand compaction.

The apparatus automatically compacts the sample and stops after the preset number of blows.

The mould is held in position by a quick and practical clamping device. The trip mechanism is arranged so that the sliding hammer falls at the same distance for every blow. The compactor includes the laminate hardwood block.

All moving parts are protected with safety guard, which stops automatically the compactor when opened, and the control panel is fit with an emergency stop red button.

There are 2 models designed for 4" and 6" dia. Marshall molds.

In the model for 4" dia. Marshall molds, The drive mechanism lifts the 4536 g \pm 9 gr compaction hammer, plated against corrosion, to the height of 457mm \pm 3 mm allows free fall.

In the model for 6" dia. Marshall molds, The drive mechanism lifts the 10205 g \pm 10 gr compaction hammer, plated against corrosion, to the height of 457mm \pm 3 mm allows free fall.

Soundproof Safety Cabinet is available as optional and should be ordered separately.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS1755/2 | Compaction Hammer for HR-AS1755 |
| HR-AS1760/2 | Compaction Hammer for HR-AS1760 |
| HR-AS1750/1 | Soundproof Safety Cabinet for HR-AS1755 |
| HR-AS1760/1 | Soundproof Safety Cabinet for HR-AS1760 |



HR-AS1755

Technical Specifications:

| Product Code | HR-AS1755 | HR-AS1755/60Hz | HR-AS1760 | HR-AS1760/60Hz |
|-------------------------|------------------------------|--------------------|--------------------|--------------------|
| Product Name | Automatic Marshall Compactor | | | |
| Suitable Sample Dia. | 4" | | 6" | |
| Blows frequency | 60 blows in 60 s | | | |
| Sliding mass weight (g) | 4536 ±9 | | 10205 ± 10 | |
| Free fall height (mm) | 457 ±3 | | | |
| Overall dimensions (cm) | 55x190x55 | | 60x195x70 | |
| Weight (kg) | 127 | | 140 | |
| Power Supply | 220 V, 50 Hz, 1 ph | 220 V, 60 Hz, 1 ph | 220 V, 50 Hz, 1 ph | 220 V, 60 Hz, 1 ph |

MARSHALL MOULDS

STANDARDS: EN 12697-10, 12697-30, ASTM D1559, D6926, D5581; AASHTO T245

The Marshall Compaction Moulds are used to produce the Marshall specimens with automatic or manual compactors.

Complete with base plate, mould body and collar. Marshall Mould is made of Steel and plated against corrosion.

Technical Specifications:

| Product Code | Product Name | Standard | Dimensions | Weight (kg) |
|--------------|---|----------|------------|-------------|
| HR-AS1770 | Marshall Mould Set | EN | Ø 101,6 mm | 3,7 |
| HR-AS1775 | Marshall Mould Set | ASTM | 4" | 3,7 |
| HR-AS1780 | Marshall Mould Set | ASTM | 6" | 6 |
| HR-AS1785 | Marshall Storage Plate for 6 pcs. for 4"specimens | EN, ASTM | 25x50x7 cm | 6 |

Spare Parts & Accessories:

| Product Code | Product Name | Standard | Dimensions | Weight (kg) |
|--------------|--|----------|----------------|-------------|
| HR-AS1770/1 | Mould Body for HR-AS1770 | EN | Ø 101,6 mm | 1,3 |
| HR-AS1770/2 | Base plate for HR-AS1770 | EN | Ø 120 x 170 mm | 1,5 |
| HR-AS1770/3 | Collar for HR-AS1770 | EN | Ø 101,6 mm | 0,9 |
| HR-AS1775/1 | Mould Body for HR-AS1775 | ASTM | 4" | 1,3 |
| HR-AS1775/2 | Base plate for HR-AS1775 | ASTM | Ø 120 x 170 mm | 1,5 |
| HR-AS1775/3 | Collar for HR-AS1775 | ASTM | 4" | 0,9 |
| HR-AS1780/1 | Mould Body for HR-AS1780 | ASTM | 6" | 2,2 |
| HR-AS1780/2 | Base plate for HR-AS1780 | ASTM | Ø 175 x 210 mm | 2,5 |
| HR-AS1780/3 | Collar for HR-AS1780 | ASTM | 6" | 1,3 |
| HR-AS1790 | Filter paper for HR-AS1770 & HR-AS1775 | ASTM | 4" | --- |
| HR-AS1795 | Filter paper for HR-AS1780 | ASTM | 6" | --- |



HR-AS1795



HR-AS1790

UNIVERSAL EXTRUDER

STANDARDS: EN 12697-30, 13286-2, 13286-47; AASTHO T245, T134, T180, T193; ASTM D1559, D698, D1557, D1883; BS 598-107, 1377-4, 1924-2

Used to extrude samples having dia. 4", 6", 100 mm and 150 mm. It can therefore extrude CBR, Marshall and Proctor specimens.

The extruder is actuated by a 50 kN hydraulic jack, having ram travel of 130 mm + 90 mm screw.

Supplied complete with adaptors.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--------------------|-----------------|-------------|
| HR-AS1800 | Universal Extruder | Ø 30 x 54 | 30 |



HR-AS1800

HİRA TESTING EQUIPMENT

MARSHALL STABILITY TEST MACHINE WITH LOAD RING

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245

The HR-AS5005 50 kN Capacity Marshall Stability Test Machine with Load Ring is used to determine the maximum load and flow values of bituminous mixtures. The machine comprises of a robust and compact two column frame with adjustable upper cross beam. The unit is a bench mounting compression frame with motor and worm gear housed within the base unit.

Platen rate is 50.8 mm/min also maintained under load thanks to an overpowered electric motor.

For safety, the up and down travel of the lower platen is limited the use of limit switches. The machine can be hand operated by a lateral hand wheel for calibration purposes.

The Marshall Stability Test Machine with Load Ring is supplied complete with 50 kN capacity Load Ring with 0,01 mm resolution Analog Dial gauge, 30 x 0.01 mm Dial Gauge and Breaking Head (Stability Mould) for Ø 4" Marshall samples.

Breaking Head (Stability Mould) for Ø 6" Marshall samples, Indirect Tensile Splitting Device for Ø 4" Marshall samples, Indirect Tensile Splitting Device for Ø 6" Marshall samples, Loading Strips, Ø 100 mm, for Tensile Splitting Device, Loading Strips, Ø 160 mm, for Tensile Splitting Device and Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") & Ø 150 mm (6") samples should be ordered separately.



HR-AS5005

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|----------------|--|-----------------|-------------|--------------------|
| HR-AS5005 | Marshall Stability Test Machine with Load Ring | 47x61x95 | 89 | 220 V, 50 Hz, 1 ph |
| HR-AS5005/60Hz | Marshall Stability Test Machine with Load Ring | 47x61x95 | 89 | 220 V, 60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS5000/1 | Breaking Head (Stability Mould) for Ø 4" Marshall samples |
| HR-AS5000/2 | Breaking Head (Stability Mould) for Ø 6" Marshall samples |
| HR-G5003 | Load Ring, 50 kN capacity with 0,01 mm resolution Analog Dial gauge |
| HR-G0876 | Dial Gauge, 30 x 0,01 mm |
| HR-AS5000/3 | Indirect Tensile Splitting Device for Ø 4" Marshall samples |
| HR-AS5000/4 | Indirect Tensile Splitting Device for Ø 6" Marshall samples |
| HR-AS5000/5 | Loading Strips, Ø 100 mm, for Tensile Splitting Device |
| HR-AS5000/6 | Loading Strips, Ø 160 mm, for Tensile Splitting Device |
| HR-AS5000/7 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") samples |
| HR-AS5000/10 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 150 mm (6") samples |



HR-AS5000/7

DIGITAL MARSHALL STABILITY TEST MACHINE

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245, AASHTO T283

The HR-AS5000 50 kN Capacity Digital Marshall Stability Test Machine is used to determine the maximum load and flow values of bituminous mixtures.

The machine comprises of a robust and compact two column frame with adjustable upper cross beam. The unit is a bench mounting compression frame with motor and worm gear housed within the base unit. It is designed to operate with the minimum of maintenance.

Platen rate is 50.8 mm/min also maintained under load thanks to an overpowered electric motor.

For safety, the up and down travel of the lower platen is limited the use of limit switches. Rapid adjustment of the platen is controlled using the up and down buttons on the digital readout unit. The measuring system consists of a 50 kN capacity Load cell fitted to the upper cross beam to read stability values and the 25 mm Displacement Sensor fitted to the Breaking Head.

Supplied complete with LCD Marshall Control Unit, 50 kN capacity Load Cell, 25 x 0.01 mm Linear potentiometric displacement transducer with holder, Breaking Head (Stability Mould) for Ø 4" Marshall samples.

Breaking Head (Stability Mould) for Ø 6" Marshall samples, Indirect Tensile Splitting Device for Ø 4" Marshall samples, Indirect Tensile Splitting Device for Ø 6" Marshall samples, Loading Strips, Ø 100 mm, for Tensile Splitting Device, Loading Strips, Ø 160 mm, for Tensile Splitting Device and Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") & Ø 150 mm (6") samples should be ordered separately.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|----------------|---|-----------------|-------------|--------------------|
| HR-AS5000 | Digital Marshall Stability Test Machine | 47x61x95 | 89 | 220 V, 50 Hz, 1 ph |
| HR-AS5000/60Hz | Digital Marshall Stability Test Machine | 47x61x95 | 89 | 220 V, 60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS5000/F | Marshall Stability Test Frame, 50 kN capacity |
| HR-G0981 | Load cell, 50 kN capacity |
| HR-G0995 | Displacement Sensor, 25 x 0,01 mm |
| HR-AS5000/8 | LCD Marshall Control Unit |
| HR-AS5000/1 | Breaking Head (Stability Mould) for Ø 4" Marshall samples |
| HR-AS5000/2 | Breaking Head (Stability Mould) for Ø 6" Marshall samples |
| HR-AS5000/3 | Indirect Tensile Splitting Device for Ø 4" Marshall samples |
| HR-AS5000/4 | Indirect Tensile Splitting Device for Ø 6" Marshall samples |
| HR-AS5000/5 | Loading Strips, Ø 100 mm, for Tensile Splitting Device |
| HR-AS5000/6 | Loading Strips, Ø 160 mm, for Tensile Splitting Device |
| HR-AS5000/7 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") samples |
| HR-AS5000/10 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 150 mm (6") samples |



HR-AS5000



HR-AS0500/1 & HR-G0981
HR-G0995 & HR-AS5000/1



HR-AS5000/7

HİRA TESTING EQUIPMENT



DIGITAL MARSHALL STABILITY TEST MACHINE WITH H-TOUCH PRO MAX MARSHALL CONTROL UNIT (TOUCH SCREEN)

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245, AASHTO T283

The HR-AS5000/TS 50 kN Capacity Digital Marshall Stability Test Machine is used to determine the maximum load and flow values of bituminous mixtures.

The machine comprises of a robust and compact two column frame with adjustable upper cross beam. The unit is a bench mounting compression frame with motor and worm gear housed within the base unit. It is designed to operate with the minimum of maintenance.


Platen rate is 50.8 mm/min also maintained under load thanks to an overpowered electric motor.

For safety, the up and down travel of the lower platen is limited the use of limit switches. Rapid adjustment of the platen is controlled using the up and down buttons on the digital readout unit.

The measuring system consists of a 50 kN capacity Load cell fitted to the upper cross beam to read stability values and the 25 mm Displacement Sensor fitted to the Breaking Head.

Supplied complete with HİRATEST H-Touch Pro Max Marshall Control Unit, 50 kN capacity Load Cell, 25 x 0.01 mm Linear potentiometric displacement transducer with holder, Breaking Head (Stability Mould) for Ø 4" Marshall samples, HİRATEST H-GUI Marshall Software and LAN Connection Cable.

Breaking Head (Stability Mould) for Ø 6" Marshall samples, Indirect Tensile Splitting Device for Ø 4" Marshall samples, Indirect Tensile Splitting Device for Ø 6" Marshall samples, Loading Strips, Ø 100 mm, for Tensile Splitting Device, Loading Strips, Ø 160 mm, for Tensile Splitting Device and Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") & Ø 150 mm (6") samples should be ordered separately.

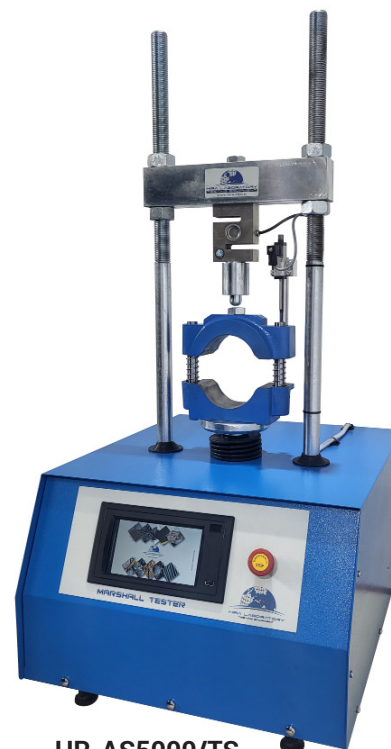

HR-AS5000/TS

H-TOUCH PRO MAX MARSHALL CONTROL UNIT

HİRATEST H-Touch Pro Max Marshall Control Unit is designed to control Marshall Test Machine to perform by processing of data from displacement transducers which are fitted to the machine.

All the operations of H-Touch Pro Max Marshall Control Unit are controlled from the front panel color resistive of TFT-LCD Touchscreen display and function keys.

The Unit can perform Marshall tests as a stand-alone without the use of a PC or with the HİRATEST H-GUI Marshall Software and a PC. Control of machine, acquisition of load and displacement data in real time are provided by the unit.

The unit has easy to use menu options.

It displays all menu option listings simultaneously, allowing the operator to access the required option in a seamless manner to activate the option or enter a numeric value to set the test parameters and see all the data while the test running.

Main Features of H-Touch Pro Max Marshall Control Unit


- Flow and stability values are automatically calculated and saved,
- Ability to perform displacement-controlled tests
- Real time display of test graph
- 2 analog channels for load cell and displacement sensors
- Multi-language support (English, French, Spanish, Turkish)
- Real-time date/time
- Test results display and memory management interface
- Calibration function for channels
- Programmable digital gain adjustment for load-cell and potentiometric sensors, voltage and current transmitters
- Closed loop PID for steady pace rate
- Connection and control feature via Ethernet
- Free computer software for test control and enhanced report output



HR-AS5000/8/TS

Hardware

- Permanent storage capacity up to 10 0000 test results
- 1/256000 dot resolution for each channel
- 10 data acquisition per second (at sample rate) on each channel
- 2 fully customizable analog channels with 24-bit ADC and PGA-FPGA circuit
- Ethernet port for computer connection
- 800x480 pixel and 65535 color resolution TFT-LCD touchscreen
- 33 Hz control loop
- 32 Bit, 120 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data acquisition
- 32 Bit, 400 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data display
- Choice of three unit systems: kN, ton or lb
- Additional memory support up to 32 GB via external USB flash drive
- Support for -optionally supplied- integrated thermal printer
- LAN connection for instantaneous transfer of test data to PC.
- USB port support for transfer of test data to a flash drive

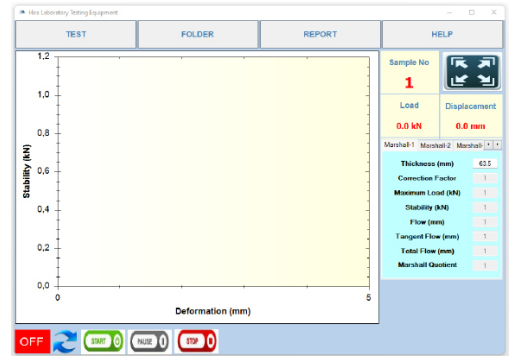

Software

HIRATEST H-GUI Marshall Software has been designed for Marshall stability tests in accordance with EN 12697-34, ASTM D 1559, D5581, D 6927, AASHTO T 245, NF P98-0251-2 indirect tensile tests in accordance with EN 12697-23 EN 12697-12 (method A), ASTM 6931, AASHTO T283.

The software includes control of machine, acquisition of load and displacement data, generating and saving reports.

Test type is selected in the software and then the sample height is entered as the test parameter. It automatically calculates correction factor coming from the standards with respect to specimen thickness. The stability value is calculated regarding this factor.


The software continuously updates load and displacement until the end of test. When the test is completed, the sharpest slope of the graph is calculated. The sharpest slope is shifted 1.5 mm to the right side of the graph and the intersection between 2nd slope and original test data is recorded as the stability value for the test. The horizontal distance between the intersection of first slope and X axis and intersection of test data with 2nd slope is recorded as "flow" value.

The report includes all results for 4 samples. The user can see 4 of the results on the same screen for easy comparison.

| Marshall Stability and Flow of Asphalt Mixtures | | | | | | |
|---|----------------|-------------------|-------------------|----------------|-----------|---------------------------------|
| Company | | | | | | |
| Project | | | | | | |
| Address | | | | | | |
| Bitumen Content | | | | | | |
| Marshall Description | | | | | | |
| Min. No. Test Temperature | | | | | | |
| Test Date | | | | | | |
| Average Marshall Stability | | | | | | |
| | Thickness (mm) | Correction Factor | Minimum Load (kN) | Stability (kN) | Flow (mm) | Marshall Q ₁ (kN/mm) |
| Sample 1 | | | | | | |
| Sample 2 | | | | | | |
| Sample 3 | | | | | | |
| Sample 4 | | | | | | |
| Average | | | | | | |
| Tested By: | | | | Approved By: | | |

Main Features of H-GUI Marshall Software

- Multi-language support and user interface
- Refreshing Experiment Graphic Displays on the Screen in Real Time
- Able to save frequently used texts in memory and recall them when necessary
- Modification of test machine parameters using the software

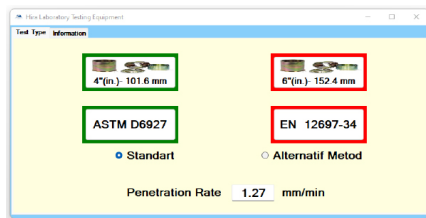

HR-AS0500/1 & HR-G0981
HR-G0995 & HR-AS5000/1

HİRA TESTING EQUIPMENT

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|-------------------|---|-----------------|-------------|--------------------|
| HR-AS5000/TS | Digital Marshall Stability Test Machine | 47x61x95 | 89 | 220 V, 50 Hz, 1 ph |
| HR-AS5000/60Hz/TS | Digital Marshall Stability Test Machine | 47x61x95 | 89 | 220 V, 60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|----------------|--|
| HR-AS5000/F | Marshall Stability Test Frame, 50 kN capacity |
| HR-G0981 | Load cell, 50 kN capacity |
| HR-G0995 | Displacement Sensor, 25 x 0,01 mm |
| HR-AS5000/8/TS | H-Touch Pro Max Marshall Control Unit |
| HR-AS5000/9 | H-GUI Marshall Software |
| HR-AS5000/1 | Breaking Head (Stability Mould) for Ø 4" Marshall samples |
| HR-AS5000/2 | Breaking Head (Stability Mould) for Ø 6" Marshall samples |
| HR-AS5000/3 | Indirect Tensile Splitting Device for Ø 4" Marshall samples |
| HR-AS5000/4 | Indirect Tensile Splitting Device for Ø 6" Marshall samples |
| HR-AS5000/5 | Loading Strips, Ø 100 mm, for Tensile Splitting Device |
| HR-AS5000/6 | Loading Strips, Ø 160 mm, for Tensile Splitting Device |
| HR-AS5000/7 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 100 mm (4") samples |
| HR-AS5000/10 | Indirect Tensile Test Jig for Compacted Bituminous Samples with 30x0,01 mm Analog Dial Gauge for Ø 150 mm (6") samples |



HR-AS5000/7

CBR & MARSHALL TESTING MACHINE WITH LOAD RING

CBR & Marshall Testing Machine with Load Ring is used to make CBR and Marshall Tests.

The device is composed of a robust and compact two column frame with adjustable upper cross beam driven by an electromechanical ram with a maximum capacity of 50 kN.

The frame has 50 kN capacity. Three test speeds are provided 1.0 mm/min for BS CBR Tests, 1.27 mm/min for ASTM/EN/AASHTO CBR Tests and 50.8 mm/min for Marshall Tests.

Three models are available according the Dial Gauge.

The HR-AS0505 Analog Model is supplied complete with 50 kN Load Ring with 0,01 mm resolution Analog Dial Gauge.

The HR-AS0510 Digital Model is complete with 50 kN Load Ring with 0,01 mm resolution Digital Dial Gauge.

The HR-AS0515 Digital Model is complete with 50 kN Load Ring with 0,001 mm resolution Digital Dial Gauge.

The other Test Accessories should be ordered separately according to the test. Penetration Piston for CBR Tests and Breaking Head for Marshall Tests should be ordered separately.

Technical Specifications:

| Product Code | HR-AS0505 | HR-AS0510 | HR-AS0515 |
|----------------------------|---|--------------------|--------------------|
| Product Name | CBR & Marshall Testing Machine with Load Ring | | |
| Type | Analog Dial Gauge | Digital Dial Gauge | Digital Dial Gauge |
| Dial Gauge Resolution (mm) | 0,01 | 0,01 | 0,001 |
| Test Speed (mm/min) | Can be selected as 1.0 & 1.27 & 50.8 | | |
| Capacity (kN) | 50 | | |
| Dimensions (cm) | 40x65x110 | | |
| Weight (kg) | 100 | | |
| Power Supply | 220 V, 50-60 Hz, 1 ph | | |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS0505/1 | CBR & Marshall Testing Frame |
| HR-G5003 | Load Ring, 50 kN capacity with 0,01 mm resolution Analog Dial gauge |
| HR-G5013 | Load Ring, 50 kN capacity with 0,01 mm resolution Digital Dial gauge |
| HR-G5008 | Load Ring, 50 kN capacity with 0,001 mm resolution Digital Dial gauge |

Marshall Test Systems

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245

Should be used with Breaking Head Stability Mould for 4" (101,6 mm) or 6" (152,4 mm) Marshall Samples and Adaptor for Breaking Head to perform Marshall Tests.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS5000/1 | Breaking Head Stability Mould for 4" (101,6 mm) Marshall Samples |
| HR-AS5000/2 | Breaking Head Stability Mould for 6" (152,4 mm) Marshall Samples |

CBR Test Systems

STANDARDS: EN 13286-47, BS 1377:4, ASTM D1883, AASHTO T193, NF P94-078, UNI CNR 10009

Should be used with CBR Penetration Piston to perform CBR Tests.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-S5000/1 | CBR Penetration piston, used to perform CBR Tests |



HR-AS0505/1 & HR-G5003
HR-AS5000/1



HR-AS0505/1 & HR-G5003
HR-S5000/1 & HR-G0876

HİRA TESTING EQUIPMENT

CBR & MARSHALL & UNAXIAL TESTING MACHINE

CBR & Marshall & Uniaxial Testing Machine is used to make CBR, Marshall and Uniaxial Unconfined Compressive Tests.

The device is composed of a robust and compact two column frame with adjustable upper cross beam driven by an electromechanical ram.

Two models are available as 50 kN and 100 kN capacity.

The testing speed can be set between 0,001 mm/min to 51mm/min.

The speed setting of the loading plate is controlled from the digital readout unit. For safety, the up and down travel of the lower platen is limited the use of limit switches.

The measuring system consists of a 50 kN or 100 kN capacity load cell according to capacity of frame fitted to the upper cross beam to read stability values and the 25 mm Displacement Sensor fitted to the column.

Supplied complete with LCD CBR & Marshall & Uniaxial Control Unit, 50 kN or 100 kN capacity Load Cell according to capacity of frame, 25 x 0.01 mm Linear potentiometric displacement transducer with holder.

The other Test Accessories should be ordered separately according to the test. Compression Platens with ball seating assembly for Uniaxial Tests, Penetration Piston for CBR Tests and Breaking Head for Marshall Tests should be ordered separately.

Technical Specifications:

| Product Code | HR-AS0500 | HR-AS0501 |
|-----------------|---|-----------|
| Product Name | CBR & Marshall & Uniaxial Testing Machine | |
| Test Speed | 0,001 - 51 mm/min | |
| Capacity (kN) | 50 | 100 |
| Dimensions (cm) | 47x70x110 | 52X72X110 |
| Weight (kg) | 100 | 110 |
| Power Supply | 220 V, 50-60 Hz, 1 ph | |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS0500/1 | CBR & Marshall & Uniaxial Frame, 50 kN |
| HR-AS0501/1 | CBR & Marshall & Uniaxial Frame, 100 kN |
| HR-G0981 | Load Cell, 50 kN capacity |
| HR-G0982 | Load Cell, 100 kN capacity |
| HR-G0995 | Displacement Sensor, 25 x 0,01 mm |
| HR-E9000 | LCD CBR & Marshall & Uniaxial Control Unit |

UNIAXIAL TEST SYSTEMS


STANDARDS: ASTM D2166, AASHTO T208

Compression Platens, used to perform uniaxial and unconfined compression tests.

Supplied complete with ball seating assembly.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-S1010 | Compression Platens with ball seating assembly |

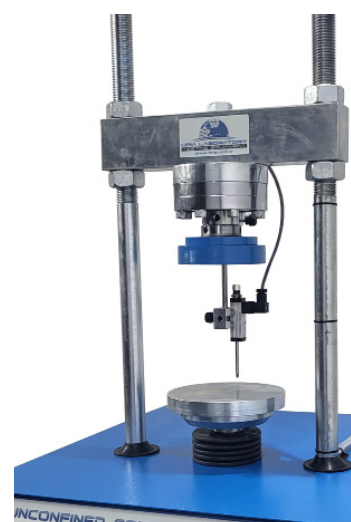

CBR TEST SYSTEMS

STANDARDS: EN 13286-47, BS 1377:4, ASTM D1883, AASHTO T193, NF P94-078, UNI CNR 10009

Should be used with CBR Penetration Piston to perform CBR Tests.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-S5000/1 | CBR Penetration piston, used to perform CBR Tests |



HR-AS0500/1 & HR-G0981
HR-G0995 & HR-AS5000/1



HR-AS0500/1 & HR-G0981
HR-G0995 & HR-S5000/1
HR-S5100

MARSHALL TEST SYSTEMS

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245

Should be used with Breaking Head Stability Mould for 4" (101,6 mm) or 6" (152,4 mm) Marshall Samples and Adaptor for Breaking Head to perform Marshall Tests.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS5000/1 | Breaking Head Stability Mould for 4" (101,6 mm) Marshall Samples |
| HR-AS5000/2 | Breaking Head Stability Mould for 6" (152,4 mm) Marshall Samples |

HİRA TESTING EQUIPMENT



CBR & MARSHALL & UNIAXIAL TESTING MACHINE WITH H-TOUCH PRO MAX CBR & MARSHALL & UNIAXIAL CONTROL UNIT (TOUCH SCREEN)

CBR & Marshall & Uniaxial Testing Machine is used to make CBR, Marshall and Uniaxial Unconfined Compressive Tests.

The device is composed of a robust and compact two column frame with adjustable upper cross beam driven by an electromechanical ram.

Two models are available as 50 kN and 100 kN capacity.

The testing speed can be set between 0,001 mm/min to 51mm/min.

The speed setting of the loading plate is controlled from the digital readout unit. For safety, the up and down travel of the lower platen is limited the use of limit switches.

The measuring system consists of a 50 kN or 100 kN capacity load cell according to capacity of frame fitted to the upper cross beam to read stability values and the 25 mm Displacement Sensor fitted to the column.

Supplied complete with HİRATEST H-Touch Pro Max CBR & Marshall & Uniaxial Control Unit, 50 kN or 100 kN capacity Load Cell according to capacity of frame, 25 x 0.01 mm Linear potentiometric displacement transducer with holder, HİRATEST H-GUI CBR & Marshall & Uniaxial Software and LAN Connection Cable.

The other Test Accessories should be ordered separately according to the test. Compression Platens with ball seating assembly for Uniaxial Tests, Penetration Piston for CBR Tests and Breaking Head for Marshall Tests should be ordered separately.



H-TOUCH PRO MAX CBR & MARSHALL & UNIAXIAL CONTROL UNIT

HİRATEST H-Touch Pro Max CBR & Marshall & Uniaxial Control Unit is designed to control of data from displacement transducers which are fitted to the machine.

All the operations of H-Touch Pro Max CBR & Marshall & Uniaxial Control Unit are controlled from the front panel color resistive of TFT-LCD Touchscreen display and function keys.

The Unit can perform CBR & Marshall & Uniaxial tests as a stand-alone without the use of a PC or with the HİRATEST H-GUI CBR & Marshall & Uniaxial Software and a PC. Control of machine, acquisition of load and displacement data in real time are provided by the unit.

The unit has easy to use menu options.

It displays all menu option listings simultaneously, allowing the operator to access the required option in a seamless manner to activate the option or enter a numeric value to set the test parameters and see all the data while the test running.

Main Features of H-Touch Pro Max CBR & Marshall & Uniaxial Control Unit

- Calculates corrected CBR value at 2.5 and 5 mm in CBR Tests.
- The digital unit saves the load value at user defined displacement values such as 0.625, 1.25, 1.875, 2.5, 3.75, 5, 7.5, 10, 13 mm in CBR Tests.
- The % CBR at 2.5 mm and % CBR at 5 mm is also automatically calculated and saved in CBR Tests.
- Flow and stability values are automatically calculated and saved in Marshall Tests,
- The unconfined compressive strength (qu) value and the undrained shear strength (cu) value of cohesive soils are obtained.
- Ability to perform displacement-controlled tests
- Real time display of test graph
- 2 analog channels for load cell and displacement sensors
- Multi-language support (English, French, Spanish, Turkish)
- Real-time date/time
- Test results display and memory management interface
- Calibration function for channels
- Programmable digital gain adjustment for load-cell and potentiometric sensors, voltage and current transmitters
- Closed loop PID for steady pace rate
- Connection and control feature via Ethernet
- Free computer software for test control and enhanced report output



HR-E9000/TS

Hardware

- Permanent storage capacity up to 10 0000 test results
- 1/256000 dot resolution for each channel
- 10 data acquisition per second (at sample rate) on each channel
- 2 fully customizable analog channels with 24-bit ADC and PGA-FPGA circuit
- Ethernet port for computer connection
- 800x480 pixel and 65535 color resolution TFT-LCD touchscreen
- 33 Hz control loop
- 32 Bit, 120 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data acquisition
- 32 Bit, 400 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data display
- Choice of three unit systems: kN, ton or lb
- Additional memory support up to 32 GB via external USB flash drive
- Support for -optionally supplied- integrated thermal printer
- LAN connection for instantaneous transfer of test data to PC.
- USB port support for transfer of test data to a flash drive

Software

HİRATEST H-GUI CBR & Marshall & Uniaxial Software has been designed for CBR & Marshall & Uniaxial Tests.

The software includes control of machine, acquisition of load and displacement data, generating and saving reports.

• For CBR Tests;

The software prepares a summary result for the user that will only need some specific loads such as at 0.625, 1.25, 1.875, 2.5, 3.125, 3.75, 4.375, 5, 7.5, 10 and 13 mm.

The software continuously updates load, stress and displacement till the end of test. Software can automatically draw the best tangent line and perform the upward concave correction as suggested by ASTM D 1883. The corrected stress values are then calculated respect to this offset.

The CBR value at 2.5mm and 5.0mm are calculated by using the standard load values at those penetrations.

• For Marshall Tests;

Test type is selected in the software and then the sample height is entered as the test parameter. It automatically calculates correction factor coming from the standards with respect to specimen thickness. The stability value is calculated regarding this factor.

The software continuously updates load and displacement until the end of test. When the test is completed, the sharpest slope of the graph is calculated. The sharpest slope is shifted 1.5 mm to the right side of the graph and the intersection between 2nd slope and original test data is recorded as the stability value for the test. The horizontal distance between the intersection of first slope and X axis and intersection of test data with 2nd slope is recorded as "flow" value.

The report includes all results for 4 samples. The user can see 4 of the results on the same screen for easy comparison.




• For Uniaxial Unconfined Compressive Tests;

The software continuously updates load, stress, strain and displacement till the end of test.

The unconfined compressive strength (q_u) value and the undrained shear strength (c_u) value of cohesive soils are obtained.

Main Features of H-GUI CBR & Marshall & Uniaxial Software

- Multi-language support and user interface
- Refreshing Experiment Graphic Displays on the Screen in Real Time
- Able to save frequently used texts in memory and recall them when necessary
- Modification of test machine parameters using the software

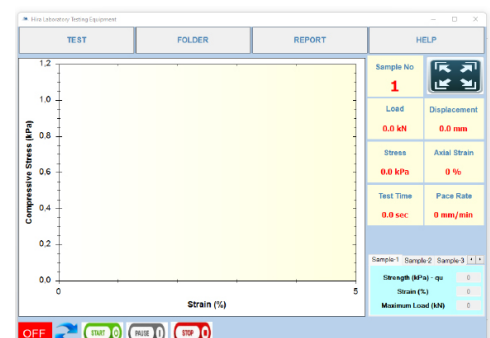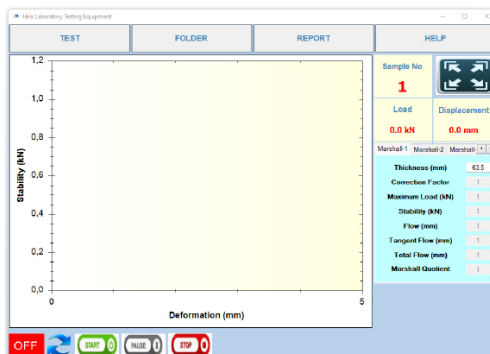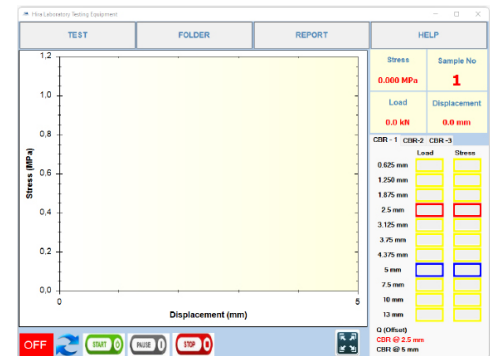

HİRA TESTING EQUIPMENT

Technical Specifications:

| Product Code | HR-AS0500/TS | HR-AS0501/TS |
|-----------------|---|--------------|
| Product Name | CBR & Marshall & Uniaxial Testing Machine | |
| Test Speed | 0,001 - 51 mm/min | |
| Capacity (kN) | 50 | 100 |
| Dimensions (cm) | 47x70x110 | 52X72X110 |
| Weight (kg) | 100 | 110 |
| Power Supply | 220 V, 50-60 Hz, 1 ph | |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS0500/1 | CBR & Marshall & Uniaxial Frame, 50 kN |
| HR-AS0501/1 | CBR & Marshall & Uniaxial Frame, 100 kN |
| HR-G0981 | Load Cell, 50 kN capacity |
| HR-G0982 | Load Cell, 100 kN capacity |
| HR-G0995 | Displacement Sensor, 25 x 0,01 mm |
| HR-E9000/TS | H-Touch Pro Max CBR & Marshall & Uniaxial Control Unit |
| HR-E9000/1 | H-GUI CBR & Marshall & Uniaxial Software |

UNIAXIAL TEST SYSTEMS


STANDARDS: ASTM D2166, AASHTO T208

Compression Platens, used to perform uniaxial and unconfined compression tests.

Supplied complete with ball seating assembly.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-S1010 | Compression Platens with ball seating assembly |

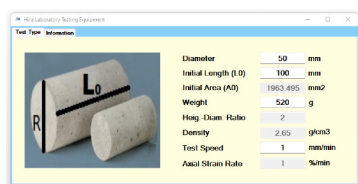


California Bearing Ratio Test Report

| | |
|----------------------|--|
| Company Name | |
| Project Name | |
| Location | |
| Depth | |
| Material Description | |
| Test ID | |
| Test Date | |

| | 0.425 | 1.25 | 1.875 | 2.5 | 3.125 | 3.75 | 4.75 | 5 | 7.5 | 10 | CBR |
|----------|--------|------|-------|-----|-------|------|------|----|-----|----|----------|
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | Ratio, % |
| Sample 1 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |
| Sample 2 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |
| Sample 3 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |

Tested By: _____ Approved By: _____

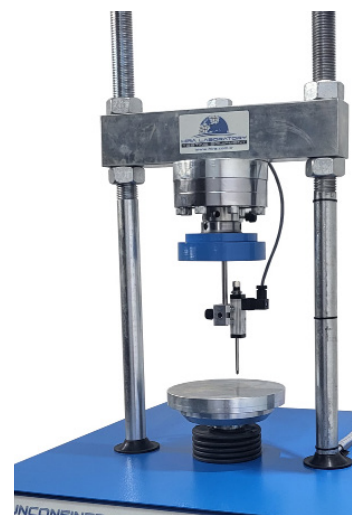

HR-AS0500/1 & HR-G0981
HR-G0995 & HR-S1010

CBR TEST SYSTEMS

STANDARDS: EN 13286-47, BS 1377:4, ASTM D1883, AASHTO T193, NF P94-078, UNI CNR 10009

Should be used with CBR Penetration Piston to perform CBR Tests.

California Bearing Ratio Test Report


| | |
|----------------------|--|
| Company Name | |
| Project Name | |
| Location | |
| Depth | |
| Material Description | |
| Test ID | |
| Test Date | |

| | 0.425 | 1.25 | 1.875 | 2.5 | 3.125 | 3.75 | 4.75 | 5 | 7.5 | 10 | CBR |
|----------|--------|------|-------|-----|-------|------|------|----|-----|----|----------|
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | Ratio, % |
| Sample 1 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |
| Sample 2 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |
| Sample 3 | Stress | | | | | | | | | | |
| | Load | | | | | | | | | | |

Tested By: _____ Approved By: _____

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-S5000/1 | CBR Penetration piston, used to perform CBR Tests |

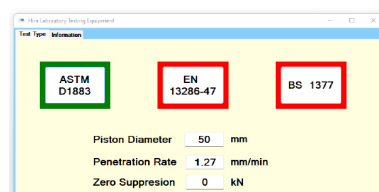


HR-AS0500/1 & HR-G0981
HR-G0995 & HR-S5000/1
HR-S5100

MARSHALL TEST SYSTEMS

STANDARDS: EN 12697-34, 12697-23, 12697-12, 13108, ASTM D1559, AASHTO T245

Should be used with Breaking Head Stability Mould for 4" (101,6 mm) or 6" (152,4 mm) Marshall Samples and Adaptor for Breaking Head to perform Marshall Tests.

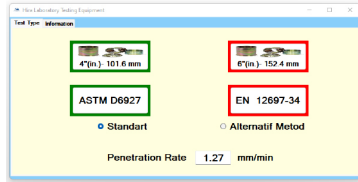

| Marshall Stability and Flow of Asphalt Mixtures | | | | | | |
|---|----------------|-------------------|----------------|----------------|-----------|---|
| Company | | | | | | |
| Project | | | | | | |
| Address | | | | | | |
| Bitumen Content | | | | | | |
| Material Description | | | | | | |
| Marshall Test Temperature | | | | | | |
| Test Date | | | | | | |
| Average Bulk Density | | | | | | |
| Sample | Thickness (mm) | Correction Factor | Maximum L. (N) | Stability (kN) | Flow (mm) | Marshall Q _v (kN/mm ²) |
| Sample 1 | | | | | | |
| Sample 2 | | | | | | |
| Sample 3 | | | | | | |
| Sample 4 | | | | | | |
| Average | | | | | | |
| Tested By: | | | Approved By: | | | |



HR-AS0500/1 & HR-G0981
HR-G0995 & HR-AS5000/1

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS5000/1 | Breaking Head Stability Mould for 4" (101,6 mm) Marshall Samples |
| HR-AS5000/2 | Breaking Head Stability Mould for 6" (152,4 mm) Marshall Samples |

HİRA TESTING EQUIPMENT

WATER BATHS

STANDARDS: EN 12697-27, ASTM D1559, AASHTO T245, AASHTO T283

Water baths are fully double walled stainless steel made with high quality stone wool insulation. The specimens are held by a shelf spaced from the bottom.

Working temperature is ambient to $99.9\text{ }^{\circ}\text{C} \pm 0.1\text{ }^{\circ}\text{C}$.

Complete with digital thermostat and electric stirrer "for continuous water recirculation", ensuring a constant and uniform temperature.

Water bath with cooling unit is also available. Working temperature is ambient to $+5\text{ to }70\text{ }^{\circ}\text{C} \pm 0.1\text{ }^{\circ}\text{C}$.

Depending on the capacity of the water bath, cooling unit can be under or near the water bath.



HR-G1505

Technical Specifications:

| Product Code | Product Name | Capacity (lt) | Int. Dimensions (cm) | Ext. Dimensions (cm) | Weight (kg) | Temperature Range ($^{\circ}\text{C}$) |
|--------------|------------------------------------|---------------|----------------------|----------------------|-------------|--|
| HR-G1500 | Water Bath with Circulation System | 15 | 16x33x30 | 30x52x37 | 14 | Ambient to 99.9 |
| HR-G1505 | Water Bath with Circulation System | 30 | 16x51x30 | 30x69x37 | 17 | Ambient to 99.9 |
| HR-G1510 | Water Bath with Circulation System | 48 | 16x65x55 | 30x82x58 | 24 | Ambient to 99.9 |
| HR-G1525 | Water Bath with cooling device | 15 | 16x33x30 | 63x40x60 | 25 | +5 to 70 |
| HR-G1530 | Water Bath with cooling device | 30 | 16x51x30 | 63x40x76 | 35 | +5 to 70 |
| HR-G1535 | Water Bath with cooling device | 48 | 16x65x55 | 65x62x90 | 45 | +5 to 70 |

Technical Specifications:

| | |
|------------------------|---------------------------------------|
| Temperature Sensor | Fe - Const |
| Control System | PID & MP |
| Temperature Resolution | $\pm 0.1\text{ }^{\circ}\text{C}$ |
| Pump Capacity | 5 lt |
| Int. Surface Material | Stainless Steel |
| Ext. Surface Material | Steel with Electrostatic Powder Paint |
| Power Supply | 220 V, 50-60 Hz, 1 ph |



HR-G1530

BITUMEN PENETROMETER

STANDARDS: EN 1426, ASTM D5, AASHTO T49

Used to determine the consistency of a bituminous sample under fixed conditions of load, time and temperature. The penetration is expressed in distance of tenths of millimeters vertically penetrated by a standard needle.

Penetration is measured with digital gauge 0,01 mm resolution.

The Bitumen Penetrometer is supplied with stop and release push button, automatic zero timer set, penetration needle, transfer dish and 6 penetration tins 55x35 mm dia.

Mirror with articulate holder is available to make easy the surface contact between the needle and the sample and should be ordered separately.

The other accessories should be ordered separately.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|---|-----------------|-------------|-----------------------|
| HR-AS1925 | Semi-Automatic Digital Bitumen Penetrometer | 20x30x50 | 10 | 220 V, 50-60 Hz, 1 ph |



Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Standards |
|--------------|---|-----------------|-------------|------------------------------|
| HR-AS1925/1 | Penetration Needle | --- | 0,0025 | EN 1426, ASTM D5, AASHTO T49 |
| HR-AS1925/2 | Transfer Dish for HR-AS1925 & HR-AS1950 | --- | --- | --- |
| HR-G0610 | Moisture content tin | Ø 5,5 x 3,5 | 0,02 | --- |
| HR-G0608 | Moisture content tin | Ø 7 x 4,5 | 0,03 | --- |
| HR-AS1925/7 | Mirror with adjustable holder | --- | --- | --- |
| HR-AS1925/3 | One-Quarter Scale Cone and Shaft for Lubricating Grease | --- | --- | ASTM D1403 & ASTM D1831 |
| HR-AS1925/4 | One-Half Scale Cone and Shaft for Lubricating Grease | --- | --- | ASTM D1403 & ASTM D1831 |
| HR-AS1925/5 | Brass Penetrometer Cone for Lubricating Grease and Petrolatum | --- | --- | ASTM D 217 & ASTM D 937 |
| HR-AS1925/6 | Resilience Ball Penetration Tool | --- | --- | ASTM D5329 |

AUTOMATIC BITUMEN PENETROMETER

STANDARDS: EN 1426, ASTM D5, AASHTO T49, ISO 3997, IP 49

Used to determine the consistency of a bituminous sample under fixed conditions of load, time and temperature. Penetration is expressed in tenths of a millimeter through which the standard needle penetrates vertically.

The penetration depth of the needle is determined with electronic measuring system, which is separated from the plunger during the test, this allows the free guidance of the plunger which virtually eliminates friction during the test.

The frame with levelling screws and spirit level consists of a digital control unit with touch screen, an anodised aluminum base plate with centering guide, magnifying lens and low voltage illuminator mounted on flexible arms.

At the start of each experiment, the measuring system is automatically reset. The cone is lowered so that the tip of the cone just touches the surface of the sample by pressing up and down arrows on the screen with fast and slow motion option. In this process, magnifying glass and led lamp help the user. The penetrometer allows the cone to free fall into the sample for the specific set time interval which can be set on display by user. Free fall time can be selected between 0 - 999 seconds. Using the joystick, the needle position can be adjusted precisely with the help of the magnifying glass and ultra-bright LED lamp on the device. The test result is displayed on the digital screen. 5 tests are made and the average is taken automatically.

Needle holder can be easily disassembled and reassembled for weight calibration.



HİRA TESTING EQUIPMENT

The penetrometer is supplied with penetration needle, transfer dish and 6 penetration tins 55x35 mm dia.

Water Bath (with Cooling unit or without Cooling unit), Thermometer (IP38 or ASTM 17C or 63C) required for the test and the other accessories should be ordered separately.

Water bath dish with incorporated thermostatic coil, to be connected to the Water Bath. It keeps the temperature of the bitumen sample directly on the penetrometer, by avoiding to transfer it. Water bath dish should be ordered separately.



Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Measuring Range (mm) | Resolution (mm) | Power Supply |
|--------------|--|-----------------|-------------|----------------------|-----------------|-----------------------|
| HR-AS1950 | Automatic Digital Bitumen Penetrometer | 35x33x80 | 24 | 0-50 | 0,01 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Standards |
|--------------|---|-----------------|-------------|------------------------------|
| HR-AS1925/1 | Penetration Needle | --- | 0,0025 | EN 1426, ASTM D5, AASHTO T49 |
| HR-AS1925/2 | Transfer Dish for HR-AS1925 & HR-AS1950 | --- | --- | --- |
| HR-G0610 | Moisture content tin | Ø 5,5 x 3,5 | 0,02 | --- |
| HR-G0608 | Moisture content tin | Ø 7 x 4,5 | 0,03 | --- |
| HR-AS1925/7 | Mirror with adjustable holder | --- | --- | --- |
| HR-AS1925/3 | One-Quarter Scale Cone and Shaft for Lubricating Grease | --- | --- | ASTM D1403 & ASTM D1831 |
| HR-AS1925/4 | One-Half Scale Cone and Shaft for Lubricating Grease | --- | --- | ASTM D1403 & ASTM D1831 |
| HR-AS1925/5 | Brass Penetrometer Cone for Lubricating Grease and Petrolatum | --- | --- | ASTM D 217 & ASTM D 937 |
| HR-AS1925/6 | Resilience Ball Penetration Tool | --- | --- | ASTM D5329 |
| HR-G1500 | Water Bath with Circulation System, 15 Lt capacity | 16x33x30 | 14 | --- |
| HR-G1525 | Water Bath with cooling device, 15 Lt capacity | 63x40x60 | 25 | --- |
| HR-AS1950/1 | Water bath dish with incorporated thermostatic coil | Ø 15,1x9 | --- | --- |
| HR-G1385 | IP38 Thermometer, 23 – 27 °C | 3x3x30 | 0,1 | --- |
| HR-G1398 | ASTM 17C Thermometer, 19 – 27 °C | 3x3x30 | 0,1 | ASTM 17C |
| HR-G1412 | ASTM 63C Thermometer, -8 - (+32) °C | 3x3x30 | 0,1 | ASTM 63C |

BITUMEN OVEN FOR ROLLING THIN-FILM OVEN TEST (RTFOT)

STANDARDS: EN 12607-1, ASTM D2872-12, AASHTO T240

Utilized to measure the air and heat effect on a moving film of asphaltic semisolid materials. External frame and internal chamber are stainless steel made with insulated fiberglass intermediate chamber.

Provided of large glass door of inspections.

The oven must be connected to a suitable air pressure supply.

The Control System is digital PID controller and time adjusted. The device is circulated. There is a rotating engine (15 rpm/min), vertical platform and air input for compressor. Flow meter is available for adjustable air flow.

Rolling Thin Film Oven's front cover is made from duplex glass. Internal Surface Material is Stainless Steel and External Surface Material is Sheet Iron with Electrostatic Powder Paint.

Supplied complete with precision digital thermostat to maintain 163 °C temperature, ventilation device, set of eight 64 mm x 140 mm glass containers.

8 bar, 25 lt capacity Air Pressure Pump should be ordered separately.



HR-AS2000



HR-G0825



HR-AS2000/1

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--|-----------------|-------------|------------------------|
| HR-AS2000 | Bitumen Oven for Rolling Thin-Film Oven Test (RTFOT) | 75x85x100 | 85 | 220 V, 50 -60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|---------------------------------|-----------------|-------------|------------------------|
| HR-AS2000/1 | Glass Sample Tins. (Pack of 8) | 6,4x14 | 0,5 | --- |
| HR-G0825 | Air pressure Pump, 8 bar, 25 lt | 60x30x60 | 30 | 220 V, 50 -60 Hz, 1 ph |

HİRA TESTING EQUIPMENT

BITUMEN OVEN FOR THIN-FILM OVEN & LOSS ON HEATING TEST (TFOT)

STANDARDS: EN 12607-2, EN 13303, ASTM D6, D1754, AASHTO T47, T179

Used for determining the loss in mass of oil and asphaltic / bituminous compounds when heated with the loss on heating test method.

The internal chamber is made of stainless steel and the door has a panel window. The external surface is electrostatic painted.

Oven has double wall insulation with fiberglass.

The oven is equipped of a dual safety thermostat to prevent accidental over-heating.

Oven has a working temperature ambient to 200 °C, Digital PID controller and circulation fan.

Rotating shelf and sample cups should be ordered separately according to the test type.



HR-AS2100



HR-G0601/S



HR-AS2100/1

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|---|-----------------|-------------|-----------------------|
| HR-AS2100 | Bitumen Oven for Thin-Film Oven & Loss on Heating Test (TFOT) | 60x45x70 | 60 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (mm) | Standards |
|--------------|---|-----------------|---------------------------------------|
| HR-AS2100/1 | Rotating Shelf for Loss on Heating Test | 300 | EN 13303 & ASTM D 6 & AASHTO T47 |
| HR-AS2100/2 | Rotating Shelf for Thin Film Oven Test | 300 | EN 12607-2 & ASTM D1754 & AASHTO T179 |
| HR-G0610/S | Moisture Content Tin. (Pack of 9) | Ø 55 x 35 | --- |
| HR-G0601/S | Moisture Content Tin. (Pack of 4) | Ø 140 x 9,5 | --- |
| HR-G1394 | ASTM 13C Thermometer (155 – 170 °C) | 30x30x300 | ASTM 13C |

WATER IN BITUMINOUS MATERIALS TEST SET (DEAN-STARK METHOD)

STANDARDS: ASTM D95, D244; AASHTO T55, T59; IP 74/77; CNR No.101; NLT 123

Used to determine the water content in petroleum products or bituminous materials, by distilling them with a water immiscible, volatile solvent.

Water in Bituminous Materials Test Set Complete with Electric Heater with Thermo Regulator, Glass Condenser, Glass Receiver and 10 ml Glass Still.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--|-----------------|-------------|------------------------|
| HR-AS2345 | Water in Bituminous Materials Test Set | 20x20x45 | 5 | 220 V, 50 -60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--|-----------------|-------------|------------------------|
| HR-AS2345/1 | Electric Heater with Thermo Regulator | 60x40x35 | 25 | 220 V, 50 -60 Hz, 1 ph |
| HR-AS2345/2 | Glass Condenser, Glass Receiver, Glass Still | --- | --- | --- |



HR-AS2345

ABA - ASPHALT BINDER ANALYZER

STANDARTLAR: TS EN 12697-39, AASHTO TP53, AASHTO T308, ASTM D6307

The HIRATEST ABA Asphalt Binder Analyzer is used to determine the binder content of hot mix asphalt/bituminous mixtures by the method of loss on ignition. The system combines a sophisticated furnace and weighing system to continuously measure the weight loss of a bituminous mixture during combustion and automatically calculates its binder content at the end of the test.

Supplied complete with 2 specimen baskets with a safety cover with a carrying tray mounted, a fork to catch the tray, and 3 meter metal exhaust pipe.

If the tests are to be performed consecutively without waiting for cooling, Spare Basket and Tray Set and Cooling cage and should be ordered separately.


Spare Basket and Tray Set consists of 2 pcs. basket (one has a safety cover) and a carrying tray mounted.

OVEN AND AFTERBURNER

- High efficiency heating system with afterburner chamber for a total combustion of exhaust fumes to minimize emissions to conform with EU Directives
- Sample size up to 4500 g for more representative test results
- Maximum power rating is 7,5 kW

HARDWARE

- 16 bit microprocessor with one CPU card controlling test data display, temperature, database and internal functions
- Usb support to store test results
- On board thermal printer
- Weighing system 15000 g capacity, 0.1 g resolution and detecting mass variations of $\pm 0,1$ g
- PID closed loop thermoregulation for both oven and afterburner chamber
- 950 °C Afterburner 540 °C oven set temperature according to standard
- TFT touchscreen with 800x480 resolution and 65000 colors

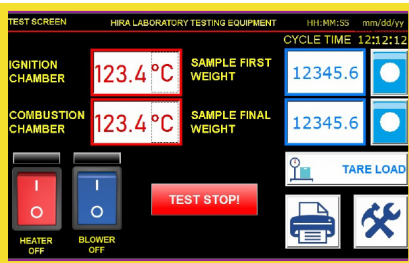

FIRMWARE

- Bidirectional real time communication with the weighing system
- Test setting menu with physical and descriptive sample parameters (initial weight, weight loss percentage, correction factor)
- Calibration menu to check and set the temperature and weight calibration for possible manual control of the test performance
- Test performance menu with simultaneous display of all the test data
- Internal memory for up to 100 tests

SAFETY FEATURES

- Automatic door locking after 150 °C
- Automatic monitoring of closed door before test start

Technical Specifications:


| Product Code | Product Name | Dimensions (mm) | Weight (kg) | Power (kW) | Power Supply |
|--------------|--|-----------------|-------------|------------|--------------------|
| HR-AS0960 | Asphalt Binder Analyzer (ABA) by the Ignation Method | 700x1000x1280 | 135 | 7,5 | 380 V, 50 Hz, 3 ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|-----------------------------|
| HR-AS0960/1 | Spare Basket and Tray Set |
| HR-AS0960/2 | Cooling Cage |
| HR-AS0960/3 | Fork |
| HR-AS0960/4 | Metal Exhaust Pipe, 3 meter |




HR-AS0960

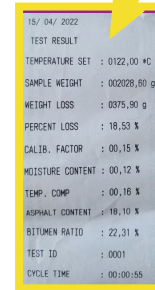

HR-AS0960/3



HR-AS0960/2

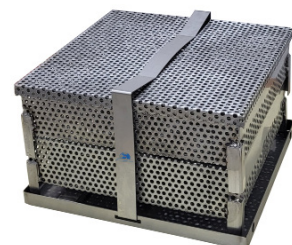

HR-AS0960/1

DUCTILITY TESTING MACHINE

STANDARDS for HR-AS2200 & HR-AS2205 : EN 13398, ASTM D113, ASTM D6084, AASHTO T51

STANDARDS for HR-AS2210 & HR-AS2215 : EN 13589, EN 13398, EN 13703, ASTM D113, ASTM D6084, AASHTO T51, AASHTO T300

Used to determine the bituminous ductility, that is to say, the distance to which a briquette of molten bitumen can be extended under controlled conditions, before its breaking.

The Ductilometer basically consists of a moving carriage travelling along guide ways. The carriage is driven by an electrical motor, inside a large tank which is fitted with digital thermostat, immersion electric heater and pump unit.

This model works in an automatic way at a speed of 50 mm/min. Models with a maximum Stroke of 1000 mm and 1500 mm are available. The tank is all made from stainless steel with fiberglass insulation and the external frame is electrostatic painted. Water bath temperature is maintained constant at $25^{\circ}\text{C} \pm 0,5^{\circ}\text{C}$ by a digital thermoregulator.

Ductilometer with Cooling System is also available and it is equipped with incorporated refrigerating unit for tests with water temperature from $+5^{\circ}$ to $+25^{\circ}\text{C}$.

Force Ductility Testing Machine has 3 loadcells. Speed can be set. Speed control with servo motor between 1 to 100 mm/min. Force Ductility Testing Machine with Cooling System is also available.

All of devices are suitable for testing 3 samples simultaneously. Supplied complete with 3 moulds and base plates.



Technical Specifications:

| Product Code | Product Name | Stroke (mm) | Dimensions (cm) | Weight (kg) | Power Supply |
|----------------|---|-------------|-----------------|-------------|--------------------|
| HR-AS2200 | Ductility Testing Machine | 1500 | 50x230x60 | 85 | 220 V, 50 Hz, 1 ph |
| HR-AS2200/60Hz | Ductility Testing Machine | 1500 | 50x230x60 | 85 | 220 V, 60 Hz, 1 ph |
| HR-AS2220 | Ductility Testing Machine | 1000 | 45x200x50 | 80 | 220 V, 50 Hz, 1 ph |
| HR-AS2220/60Hz | Ductility Testing Machine | 1000 | 45x200x50 | 80 | 220 V, 60 Hz, 1 ph |
| HR-AS2205 | Ductility Testing Machine with Cooling System | 1500 | 50x230x110 | 110 | 220 V, 50 Hz, 1 ph |
| HR-AS2205/60Hz | Ductility Testing Machine with Cooling System | 1500 | 50x230x110 | 110 | 220 V, 60 Hz, 1 ph |
| HR-AS2225 | Ductility Testing Machine with Cooling System | 1000 | 45x200x100 | 105 | 220 V, 50 Hz, 1 ph |
| HR-AS2225/60Hz | Ductility Testing Machine with Cooling System | 1000 | 45x200x100 | 105 | 220 V, 60 Hz, 1 ph |
| HR-AS2210 | Force Ductility Testing Machine | 1500 | 50x230x60 | 85 | 220 V, 50 Hz, 1 ph |
| HR-AS2210/60Hz | Force Ductility Testing Machine | 1500 | 50x230x60 | 85 | 220 V, 60 Hz, 1 ph |
| HR-AS2230 | Force Ductility Testing Machine | 1000 | 45x200x50 | 80 | 220 V, 50 Hz, 1 ph |
| HR-AS2230/60Hz | Force Ductility Testing Machine | 1000 | 45x200x50 | 80 | 220 V, 60 Hz, 1 ph |
| HR-AS2215 | Force Ductility Testing Machine with Cooling System | 1500 | 50x230x110 | 110 | 220 V, 50 Hz, 1 ph |
| HR-AS2215/60Hz | Force Ductility Testing Machine with Cooling System | 1500 | 50x230x110 | 110 | 220 V, 60 Hz, 1 ph |
| HR-AS2235 | Force Ductility Testing Machine with Cooling System | 1000 | 45x200x100 | 105 | 220 V, 50 Hz, 1 ph |
| HR-AS2235/60Hz | Force Ductility Testing Machine with Cooling System | 1000 | 45x200x100 | 105 | 220 V, 60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Standards |
|--------------|----------------------------|-----------------------------------|
| HR-AS2200/1 | Briquette Mould | ASTM D133 & AASHTO T51 |
| HR-AS2200/2 | Briquette Mould | EN 13398 |
| HR-AS2200/3 | Briquette Mould Base Plate | ASTM D133 & AASHTO T51 & EN 13398 |

AUTOMATIC RING AND BALL SOFTENING POINT APPARATUS

STANDARDS: EN 1427, ASTM D36, AASHTO T 53

Automatic Ring and Ball Apparatus is used for determining softening point of bituminous materials by ring and ball method.

The device is Microprocessor controlled and has Colored, Large Touch screen display. Two bitumen samples casted in shouldered brass rings while being held in horizontal position, temperature is increased under controlled rate according to the standards.

The softening point is the average of the temperature values read from the thermometer when each ball embedded in the disc shaped bitumen samples drops below 25.0 ± 0.4 mm. The softening point is detected by the photoelectric sensors and the temperature is measured with the PT100 sensor.

With the help of a magnetic stirrer with an adjustable speed control system, a homogeneous temperature distribution is achieved in the vessel and temperature control in accordance with the relevant standards during the experiment is provided by the 0-10 V, VDC Analog SSR.

Due to its custom software; selection of test method and test parameters, automatic start of the test, data acquisition, data recording and printing and calibration of the device can be performed. The device can save a total of 9 tests. Thanks to the USB port available on the device, the data can be transferred to the computer and opened in excel.

Single test option is available as 30 °C to 80 °C for water.

Automatic Ring and Ball Apparatus consist of 2 steel balls, Frame (thermometer and ring holder, ball centering guide and bottom plate), 2 brass rings and 800 ml glass beaker.

Thermometer should be ordered separately.

The cooling system is available as an option and must be ordered separately. The cooling system ensures that the temperature of the test liquid is reduced rapidly and the stable temperature rise rates specified in the standard are achieved and reduces the time between two tests.

Main Features

- Heating system,
- Optional Cooling system,
- Electrical beaker lifting system,
- Speed controlled magnetic stirrer,
- Digital Barrier type photoelectric sensor (for the determination of the actual value of the bitumen softening point),
- Microprocessor controlled (automatically programmable for water),
- Colored, Large Touch Screen,
- PT100 temperature probe,
- 0-10 V, VDC Analog SSR,
- USB port for computer or printer connection,
- PID controlled heating system,
- Custom Software.

Software

- Date/Time,
- Test parameter suitable for test type: 80°C
- Preheat temperature selection and thermocouple calibration (for heater temperature measurement)
- Magnetic stirrer speed adjustment (between 10 and 150 rpm)

Safety Features

- The heater turns off automatically at the end of the test cycle.
- The experiment is stopped automatically when the sensor fails or fails to position.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|----------------------------------|-----------------|-------------|------------------------|
| HR-AS2260 | Automatic Ring and Ball Test Set | 52x43x73 | 27 | 220 V, 50 -60 Hz, 1 ph |



HR-AS2260

HİRA TESTING EQUIPMENT

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--------------------------------------|-----------------|-------------|
| HR-AS2260/5 | Cooling System | --- | --- |
| HR-AS2250/1 | Steel ball, 2 pieces | --- | --- |
| HR-AS2260/2 | Frame | --- | --- |
| HR-AS2250/3 | Brass ring, 2 pieces | --- | --- |
| HR-G0008 | Glass Beaker, 800 ml | 10x10x13,5 | 0,5 |
| HR-G0391 | Glass Thermometer; max 110 °C | 3x3x30 | 0,1 |
| HR-G0392 | Glass Thermometer; max 360 °C | 3x3x30 | 0,1 |
| HR-G1395 | ASTM 15C Thermometer. -2 - (+80) °C. | 3x3x30 | 0,1 |
| HR-G1397 | ASTM 16C Thermometer. 30-200 °C. | 3x3x30 | 0,1 |

RING AND BALL SOFTENING POINT APPARATUS

STANDARDS: EN 1427, ASTM D36, AASHTO T 53

Used for determining softening point of bituminous materials by ring and ball method.

The softness of bitumen depends, amongst other factors, on the temperature of the substance, where, as the temperature is raised, the softness of the bitumen increases.

Analog Ring and Ball Test Set is supplied complete with an Analog hotplate with magnetic stirrer, 2 steel balls, Frame (thermometer and ring holder, ball centering guide and bottom plate), 2 brass rings (ASTM or EN (It must be specified at the time of order.)), 600 ml glass beaker and max. 110 °C thermometer.

Dijital Ring and Ball Test Set is supplied complete with a Digital hotplate with digital magnetic stirrer (with Immersion type temperature sensor with it's holder and a stirring bar), 2 steel balls, Frame (thermometer and ring holder, ball centering guide and bottom plate), 2 brass rings (ASTM or EN (It must be specified at the time of order.)), 800 ml glass griffin beaker and max. 110 °C thermometer.

Glass or ASTM Thermometers and Pouring Plate should be ordered separately.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--------------------------------|-----------------|-------------|------------------------|
| HR-AS2250 | Analog Ring and Ball Test Set | 21x31x40 | 4,5 | 220 V, 50 -60 Hz, 1 ph |
| HR-AS2250/D | Digital Ring and Ball Test Set | 21x31x40 | 4,5 | 220 V, 50 -60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|--------------------------------------|-----------------|-------------|-----------------------|
| HR-G1025/A | Analog Magnetic Stirrer Heater | 21x31x10 | 2,8 | 230 V, 50-60 Hz, 1 ph |
| HR-G1025/D | Digital Magnetic Stirrer Heater | 19x31x13 | 4 | 230 V, 50-60 Hz, 1 ph |
| HR-AS2250/1 | Steel ball, 2 pieces | --- | --- | --- |
| HR-AS2250/2 | Frame | --- | --- | --- |
| HR-AS2250/3 | Brass ring, 2 pieces, EN | --- | --- | --- |
| HR-AS2250/3A | Brass ring, 2 pieces, ASTM | --- | --- | --- |
| HR-AS2250/4 | Pouring Plate, EN, Metal | --- | --- | --- |
| HR-AS2250/4A | Pouring Plate, ASTM, Brass | --- | --- | --- |
| HR-G0007 | Glass Beaker, 600 ml | 9x9x12,5 | 0,25 | --- |
| HR-G0008/G | Glass Griffin Beaker, 800 ml | 10x10x13,5 | 0,5 | --- |
| HR-G0391 | Glass Thermometer; max 110 °C | 3x3x30 | 0,1 | --- |
| HR-G0392 | Glass Thermometer; max 360 °C | 3x3x30 | 0,1 | --- |
| HR-G1395 | ASTM 15C Thermometer. -2 - (+80) °C. | 3x3x30 | 0,1 | --- |
| HR-G1397 | ASTM 16C Thermometer. 30-200 °C. | 3x3x30 | 0,1 | --- |

HR-AS2250/2



HR-AS2250/1 with HR-AS2250/3

HR-AS2250

RATE OF SPREAD SPRING BALANCE

STANDARDS: EN 12272-1, EN 12274-4, BS 598:108

This simple equipment use to determine the rate of spread of binder on the surface of the road.

The equipment consists of a metal 300 mm square tray, which can be lifted by means of four chains. The chains are attached to a balance and the rate of spread can be assessed by a balance.

Strength Capacity is up to 16 kg/m² and Readability is 0.5 kg/m². It is calibrated to give direct reading in kg/ m².

Technical Specifications:

| Product Code | Product Name | Dimensions (mm) | Weight (kg) |
|--------------|-----------------------|-----------------|-------------|
| HR-AS2355 | Spread Spring Balance | 33x180x60 | 0,2 |
| HR-AS2356 | Metal Tray with Chain | 300x300x25 | 0,4 |



HR-AS2355 with
HR-AS2356

APPARATUS FOR DISTILLATION OF CUT-BACK ASPHALT

STANDARDS: EN 1431, ASTM D244, AASHTO T 59

Used to measure the amount of the most volatile constituents in cut-back asphaltic products.

The apparatus consists of Aluminium still container, bunsen burner, stand, graduated cylinder, glass connectors including condenser, two thermometers ASTM 7C, range -2 to +300°C, bunsen burner with gas stop valve controlled by a flame sensor to CE safety Directive.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-G1389 | High Distillation Thermometer, Range -2 +300°C, ASTM 7C |

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--|-----------------|-------------|
| HR-AS2325 | Apparatus for Distillation of Cut-Back Asphalt | 30x30x60 | 6 |



HR-AS2325

HİRA TESTING EQUIPMENT

CLEVELAND FLASH AND FIRE POINT TESTER

STANDARDS: EN 22592, ASTM D92, AASHTO T48, ISO 2592, IP 36

Cleveland Flash Tester is used to measure the flash and fire points of lubricated oils and petroleum products.

It consists of a brass cup mounted on an electric heater with a temperature controller and a glass thermometer. Conforming to the CE European Directive, the unit is supplied complete with a double line-fuse.

-6 + 400°C Thermometer is optional and should be ordered separately.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS2275/1 | Brass Cup |
| HR-G0392 | Glass Thermometer, Max. 360 °C |
| HR-G1393 | -6 + 400°C Thermometer, IP 28C, ASTM 11C |



HR-AS2275

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|---------------------------------------|-----------------|-------------|-----------------------|
| HR-AS2275 | Cleveland Flash and Fire Point Tester | 25x30x25 | 7 | 220 V, 50-60 Hz, 1 ph |

TAG CLOSED-CUP FLASH POINT TESTER

STANDARDS: ASTM D56

Suitable for testing volatile flammable flashing between 0 and 175°F (except fuel

Supplied complete with cup, water bath, lid, slide, electric heater, ASTM 9C rang +110°C and ASTM 57 C range -20 to +50°C thermometer.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS2280/1 | Brass Cup |
| HR-G1391 | -5 - (+110) °C Thermometer, IP 15C, ASTM 9C |
| HR-G1411 | -20 - (+50) °C Thermometer, ASTM 57C |



HR-AS2280

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|-----------------------------------|-----------------|-------------|--------------------|
| HR-AS2280 | Tag Closed-Cup Flash Point Tester | 20x30x40 | 6 | 220 V, 50 Hz, 1 ph |

SAYBOLT VISCOMETER

STANDARDS: ASTM D88, AASHTO T72

Used to determine the viscosity of petroleum products at specified temperatures between 21 to 99 °C.

Stainless steel made, the Saybolt viscometer is supplied complete with 2 x interchangeable orifices "Furol" and "Universal", oil bath, electric heater with digital thermoregulator, key, thermometer support, stirrer, cooling coil, digital thermometer, heat transfer oil and 2 pieces 60 ml glass saybolt viscosity flasks. Viscometer is 2 sample testing capacity with digital display.

Thermometer Set for Saybolt Viscometer; 19 to 27°C, 34 to 42°C, 49 to 57°C, 57 to 65°C, 79 to 87°C and 95 to 103°C where each thermometer has 0.1°C subdivisions.

Filter Funnel with Wire Mesh and Clip, Withdrawal Tube and Thermometers are optional and should be ordered separately.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS2290/1 | Furol Orifices |
| HR-AS2290/2 | Universal Orifices |
| HR-AS2290/3 | Saybolt Viscosity Flask, Glass, 60 ml |
| HR-AS2290/4 | Heat Transfer Oil, 5 lt |
| HR-AS2290/5 | Filter Funnel with Wire Mesh and Clip |
| HR-AS2290/6 | Withdrawal Tube |
| HR-G0385 | Digital Thermometer, max. 300 °C |
| HR-AS2290/8 | Thermometer Set for Saybolt Viscometer |



HR-AS2290/5

HR-AS2290/6



HR-AS2290

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply |
|--------------|-------------------------------------|-----------------|-------------|-----------------------|
| HR-AS2290 | Saybolt Two-Tube Digital Viscometer | 45x30x55 | 12 | 220 V, 50-60 Hz, 1 ph |

ENGLER VISCOMETER

STANDARDS: ASTM D1665, ASTM D490; AASHTO T54

Digital Engler Viscometer is used to compare the specific viscosity of tars and their fluid products to the viscosity of water.

It consists of a water bath complete with digital precision thermoregulator, electric stirrer.

Thermometers, Kohlrausch calibration flask, Engler Viscosity Test flask and Strainer should be ordered separately.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS2300/1 | Kohlrausch Calibration Flask, 200 ml |
| HR-AS2300/2 | Engler Viscosity Flask, Glass, 50 ml |
| HR-AS2300/3 | Strainer, No. 50, ASTM |
| HR-G1404 | ASTM 23C Thermometer. 18-28 °C. Graduation 0.2 °C. |
| HR-G1405 | ASTM 24C Thermometer. 39-54 °C. Graduation 0.2 °C. |
| HR-G1406 | ASTM 25C Thermometer. 95-105 °C. Graduation 0.2 °C. |

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) | Power Supply | Power (W) |
|--------------|---------------------------|-----------------|-------------|-----------------------|-----------|
| HR-AS2300 | Digital Engler Viscometer | 45x30x55 | 12 | 220 V, 50-60 Hz, 1 ph | 300 |



HR-AS2300

AUTOGRAPHIC RECORDING TRAVELLING BEAM DEVICE

The 3 meter long Autographic Recording Travelling Beam Device is used to check for any irregularities in both concrete and bituminous road surfaces. A sensing unit comprising a wheel connected to an indicator provides a magnification of 4:1.

Deviation of the surface from a straight-line is shown on a scale calibrated in increments of 2 mm in the 0-10 mm range and 5 mm increments in the 10-25 mm range. A dye-marker is fitted which may be used to identify suspect areas. Outrigger wheels provide mobility on site. The device is supplied as three sub-assemblies which are quickly assembled on site.

The Travelling Beam is supplied fitted with an autographic recorder providing a permanent record of the surface profile. The recorded data can be transferred to the computer via sd card.

Wooden box should be ordered separately.



Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|--|-----------------|-------------|
| HR-AS2310 | Autographic Recording Travelling Beam Device | 33x180x60 | 55 |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--------------|
| HR-AS2310/2 | Wooden Box |

SOLUBILITY TEST SET

STANDARDS: EN 12592, ASTM D2042, AASHTO T44

Solubility Test Set for Bitumen and Bituminous Binders consist of 500 ml filter flask, 30 ml glass Gooch Crucible, glass funnel, 100 g powdered glass, a rubber ring and a rubber stopper.

Solvent and water trompe should be ordered separately.


Technical Specifications:

| Product Code | Product Name |
|--------------|---------------------|
| HR-AS2350 | Solubility Test Set |

Spare Parts & Accessories:

| Product Code | Product Name | Capacity |
|--------------|----------------------------|----------|
| HR-AS2350/1 | Filter Flask for HR-AS2350 | 500 ml |
| HR-AS2350/2 | Glass Gooch Crucible | 30 ml |
| HR-AS2350/3 | Glass Funnel for HR-AS2350 | --- |
| HR-AS2350/4 | Powdered glass | 100 g |
| HR-AS2350/5 | Rubber ring | --- |
| HR-AS2350/6 | Rubber stopper | --- |
| HR-AS2351 | Metal water trompe | --- |

HR-AS2350

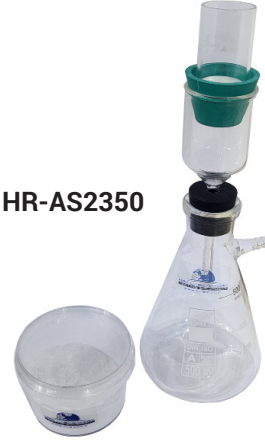

HR-AS2351

MOT STRAIGHT EDGE

STANDARDS: EN 13036-7

The MOT Straightedge is used for irregularity measurement of pavement surface.

Manufactured from anodized aluminium alloy, it is utilized to measure irregularities of road pavement, floors, concrete pavement. Length is 3 m.

Supplied with two steel wedges.

Wooden carrying case should be ordered separately.

HR-AS0915



Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|------------------|-----------------|-------------|
| HR-AS0915 | MOT Straightedge | 315x16x13 | 9 |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|-------------------------|
| HR-AS0915/1 | Steel Wedges (2 pieces) |
| HR-AS0915/2 | Wooden Carrying Case |

HİRA TESTING EQUIPMENT

BENKELMAN BEAM DEVICE

STANDARDS: AASTHO T256-77, CNR N141

Benkelman Beam Device, aluminum alloy made, complete with dial indicator and accessories, it is utilized to measure the deflection of the road surface when loaded by the wheels of vehicles.

The beam is put in contact with the pavement under test between the tires of the vehicle. The measurement of the deflection is performed when the vehicle passes over the test area.

Length of the Benkelman beam is 250 cm. Beam fulcrum ratio 4:1.

Supplied complete with wooden carrying case.



Technical Specifications:

| Product Code | Product Name | Weight (kg) |
|--------------|--------------------------|-------------|
| HR-AS0900 | Benkelman Beam Apparatus | 16 |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|-----------------------------------|
| HR-AS0900/1 | Wooden Carrying Case |
| HR-G0876 | Analog Dial Gauge, 30 x 0,01 mm |
| HR-G0878 | Digital Dial Gauge, 25 x 0,01 mm |
| HR-G0880 | Digital Dial Gauge, 25 x 0,001 mm |

PLATE BEARING EQUIPMENT

STANDARDS: NF P94-117-1

To determine the static deformation of flexible road pavement in the centre of the loading plate, the bearing capacity and deflection of subgrade and subbase of roads.

Used with the Benkelman Beam Apparatus.

HR-AS0950 Plate Bearing Equipment consists of Bearing plate 600 mm diameter cast aluminium, Piston assembly 200 kN capacity, Hydraulic hand pump, High Pressure Hose and Connection Apparatus and Analog manometer.

HR-AS0955 Digital Plate Bearing Equipment consists of Bearing plate 600 mm diameter cast aluminium, Piston assembly 200 kN capacity, Hydraulic hand pump, High Pressure Hose and Connection Apparatus, Analog Manometer, Pressure Transducer and Battery Operated Digital Readout Unit.



Spare Parts & Accessories:

| Product Code | Product Name | Capacity |
|--------------|---|----------|
| HR-AS0950/1 | Bearing Plate | Ø 600 mm |
| HR-AS0950/2 | Piston Assembly | 200 kN |
| HR-G9000 | Hydraulic Hand Pump | 700 bar |
| HR-G9000/1 | High Pressure Hose and Connection Apparatus | --- |
| HR-G9010 | Analog Manometer | --- |
| HR-S5654 | Pressure Transducer | --- |
| HR-S5655 | Battery Operated Digital Readout Unit | --- |
| HR-AS0950/2 | Wooden box for HR-AS0950 & HR-AS0955 | --- |

Technical Specifications:

| Product Code | Product Name | Weight (kg) |
|--------------|---------------------------------|-------------|
| HR-AS0950 | Plate Bearing Equipment | 100 |
| HR-AS0955 | Digital Plate Bearing Equipment | 102 |



HR-AS0950

ASPHALT MIXTURE MAXIMUM THEORY DENSITY METER

Maximum theory density meter for Asphalt Mixture used to determine the theoretical maximum specific gravity of un-compacted bituminous paving mixtures by vacuum process. It is used to design the ratio of bituminous mixtures, survey the road condition or calculate the void ratio and compactness of road construction.

Complete With 2 pieces 5 Lt Stainless Steel Vacuum Pycnometer, Vibro-Deaerator, Vacuum Pump, tubing for vacuum, Vacuum Gauge and Air Drying Unit (Water trap).



HR-AS0925

Technical Specifications:

| Product Code | Product Name | Weight (kg) | Power Supply |
|--------------|------------------------------|-------------|-----------------------|
| HR-AS0925 | Maximum Theory Density Meter | 50 | 220 V, 50-60 Hz, 1 ph |

Spare Parts & Accessories:

| Product Code | Product Name | Capacity | Dimensions (cm) | Weight (kg) | Power Supply |
|---------------|------------------------------|-------------------|-----------------|-------------|-----------------------|
| HR-AS0925/1 | Vacuum Pycnometer | 5 Lt | 85x57x46 | 40 | --- |
| HR-G0500 | Vibro-Deaerator | --- | --- | --- | 220 V, 50 Hz, 1 ph |
| HR-G0500/60Hz | Vibro-Deaerator | --- | --- | --- | 220 V, 60 Hz, 1 ph |
| HR-G0800 | Vacuum Pump | 51 Lt/min. - 2 Pa | 29x13x23 | 6,6 | 220 V, 50-60 Hz, 1 ph |
| HR-G0815 | Tubing for Vacuum | 1,5 m | --- | --- | --- |
| HR-AS0925/2 | Vacuum Gauge Manometer | 1000 mbar | Ø 6,3 | 0,15 | --- |
| HR-AS1550/2 | Air Drying Unit (Water Trap) | 500 g | --- | --- | --- |
| HR-G0935 | Silica Gel, 1 kg | 1 kg | --- | 1 | --- |

HİRA TESTING EQUIPMENT

VIALIT PLATE (BINDER ADHESION) TEST

STANDARDS: EN 12272-1, 12272-3

This apparatus is used for determining the rate of spread of coated chippings on the road surface. The method is a check on the adhesion of aggregates to be applied to the surface of wearing course rolled asphalt.

Consist of a metal basement with three vertical pointed rods to hold the test plate; a 512 g steel ball, six metal test plates and a hand operated rubber lined roller.

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS1900/1 | Flat Steel Plates, 6 pcs. |
| HR-AS1900/2 | Steel Ball, 512 g |
| HR-AS1900/3 | Rubber Wheel Roller, hand operated |
| HR-AS1900/4 | Mechanical Aggregate Deployment, 100 chippings |



HR-AS1900

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|---|-----------------|-------------|
| HR-AS1900 | Vialit Plate (Binder Adhesion) Test Apparatus | 40X140X40 | 45 |

DEPOT TRAY TEST SET

STANDARDS: BS 1707

Depot Tray Test Set is used to determine the transverse uniformity of distribution of sprayed binder to BS 1707.

Consisting of a wheeled trolley with a holding device for accepting a set of 50 containers. Containers are included.

The trolley and containers are pushed underneath the spray hood of the distributor, which is backed over a catch pit for the test. Once the containers are almost full, the trolley is withdrawn and the depth of binder in each container is measured, ensuring that the correct depth (not obscured by froth on the surface of the liquid) is obtained.

Results are expressed as a percentage deviation from the mean for all the 50mm units over the effective width.


Height is 200mm without trays and 300mm with trays (including wheels).



HR-AS2400

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|---------------------|-----------------|-------------|
| HR-AS2400 | Depot Tray Test Set | 140x365x30 | 440 |

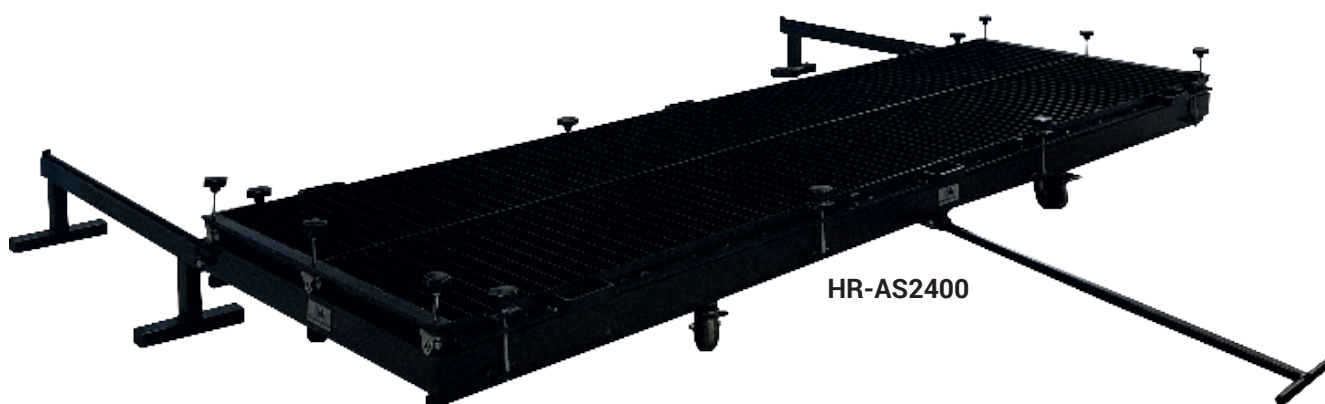

HR-AS2400

BOTTLE ROLLER APPARATUS

STANDARDS: BS 598-102, BS 812, EN 12697-1, EN 13108

A compact bench unit designed to rotate 2 bottles simultaneously about their longitudinal axis.

The Bottle Roller Apparatus is robustly constructed; designed to accept bottle of various sizes and rotates at speeds relevant to most international standards.

Main Shaft Rotation is Adjustable up to 30 rpm.

Steel Bottles and Flask funnel for Steel Bottles should be ordered separately.



HR-AS2450

Spare Parts & Accessories:

| Product Code | Product Name | Capacity (ml) |
|--------------|----------------------------------|---------------|
| HR-AS2455 | Steel Bottle with rubber stopper | 600 |
| HR-AS2456 | Steel Bottle with rubber stopper | 2500 |
| HR-AS2457 | Steel Bottle with rubber stopper | 7000 |
| HR-AS2460 | Flask funnel for Steel Bottles | --- |



HR-AS2455
HR-AS2456
HR-AS2457



HR-AS2460

Technical Specifications:

| Product Code | Product Name | Dimensions (mm) | Weight (kg) | Power Supply |
|--------------|-------------------------|-----------------|-------------|----------------------|
| HR-AS2450 | Bottle Roller Apparatus | 560x910x295 | 40 | 220 V, 50-60 Hz, 1ph |

PRESSURE FILTER

STANDARDS: BS 598-102, EN 12697-1

Pressure Filter is used for determining the bitumen content.

The Pressure Filter consists of a plated steel pressure vessel with a filter support and pressure gauge.

Foot Pump, Test Sieve, Filter Paper and Filter Filler Funnel should be ordered separately.

Technical Specifications:

| Product Code | Product Name | Dimensions (mm) | Weight (kg) |
|--------------|-----------------|-----------------|-------------|
| HR-AS2475 | Pressure Filter | Ø 292x382 | 24 |



HR-AS2475



HR-G2192

HR-AS2475/1



HR-AS2480

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|---|
| HR-AS2485 | Foot Pump, (0 -100 psi / 0 - 7 bar) with flexible hose 65 cm long approx. |
| HR-G2192 | Sieve, Ø200x50mm, stainless steel frame and mesh, woven cloth,63µm (#230) |
| HR-AS2480 | Filter Paper, Ø 270 mm with 33 mm hole (Pack of 50) |
| HR-AS2475/1 | Filter Filler Funnel |



HR-AS2485

BINDER RECOVERY APPARATUS, VACUUM PUMP METHOD **HOT EXTRACTION METHOD SOLUBLE BINDER CONTENT** **(BITUMEN RECOVERY)**

STANDARDS: BS 598-102, EN 12697-1

Used for the separation of solvent from the binder/solvent solution and to determine the binder content in an aggregate/bitumen mixture.

The apparatus consists of Thermostatically controlled Water Bath to keep boiling water during all the recovery cycle, complete with cover and digital thermostat, Vacuum Pump with Vacuum Gauge Manometer, 6 m Tubing for Vacuum, 1000 ml Filter Flask with rubber bung, Two flat-bottomed glass flasks having 250 ml capacity with rubber bungs and other necessary fittings and connections.

The Thermostatically controlled Water Bath may be used also as general purposes water bath.

For more information on the Water Bath, see Water Baths, Model HR-G1505.

For more information on the Vacuum Pump, see Vacuum Pumps, Model HR-G0801.



HR-AS2500

Technical Specifications:

| Product Code | Product Name | Weight (kg) | Power Supply |
|--------------|---------------------------|-------------|----------------------|
| HR-AS2500 | Binder Recovery Apparatus | 25 | 220 V, 50-60 Hz, 1ph |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-G1505 | Water Bath with Circulation System, 30 lt capacity |
| HR-G0801 | Vacuum Pump, Single Stage, 70 l/min |
| HR-G0815/1 | Tubing for Vacuum. 6 m |
| HR-G0816 | Vacuum Gauge Manometer, 1000 mbar, Ø63 mm |
| HR-G0082 | Filter Flask with rubber bung, 1000 ml |
| HR-G0085 | Glass Flask, Flat-bottomed, 250 ml with rubber bungs |



HR-G0085 with connections

HOT EXTRACTOR SET (PAPER FILTER METHOD)

STANDARDS: EN 12697-1

Hot Extractor Set is used to extract the binder from bituminous mixtures and to determine the moisture content.

Consisting of a Steel Pot complete with Gauze Basket and Filter, Dean Stark Collector, Condenser, Ø 400 mm Filter paper (Pack of 50).

Hot Plate should be ordered separately.

For more information on the Hot Plate, see Hot Plates, Model HR-G1010.

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|-------------------|-----------------|-------------|
| HR-AS2550 | Hot Extractor Set | 48x48x90 | 22 |

Spare Parts & Accessories:

| Product Code | Product Name |
|--------------|--|
| HR-AS2550/1 | Steel Pot with Gauze Basket and Filter |
| HR-AS2550/2 | Dean Stark Collector |
| HR-AS2555 | Filter Paper, Ø 400 mm, (Pack of 50) |
| HR-G1010 | Analog Hot Plate, Ø 20, (Single) |



HR-G1010



HR-AS2555



HR-AS2550/1

HR-AS2550

HİRA TESTING EQUIPMENT



NON-NUCLEAR ASPHALT DENSITY GAUGE, TOUCH SCREEN

STANDARDS: ASTM D 7113-05, AASHTO T 343-12

OPERATIONAL FEATURES:

Status Bar: Displays GPS status, Data Save status, battery voltage, low battery and date and time

Project Details: Stores up to 10 projects with details

Mix Details: Stores up to 20 mixes, details include (MTD, Mix Name, Stone Size, Depth Offset, Operator Name)

Data Logging: When enabled, stores all measurements taken in single or average modes (Status Bar Icon)

Reports: Easily download data to be imported into Excel

GPS Control: When activated will display latitude and longitude positions, number of satellites the gauge is connected to as well as the UTC date and time, also available in UTM format. GPS information will store with each measurement when Data Save and GPS feature is enabled (Status Bar Icon)

Update Software: One touch upload of new software using a USB memory stick

Data Management: Quickly Access, download or delete your project data

Set Time & Date: Quick time and date setup, MM/DD/YY and DD/MM/YY formats

Units: Interchangeable settings for Density (kg/m³, lb/ft³), Temp (°C, °F), Depth (in, mm) and Stone Size (in, mm)

Enhanced Customer Support: Diagnostic screen to aid in factory Support

User Programmable Target Density: Used for calculating % compaction

GENERAL FEATURES:

- New status bar feature, displays GPS status, data save status, available battery voltage, low battery status and date and time
- Measures density in common units (kg/m³), and can measure the asphalt temperature
- New data management feature, you can store 4000 readings on the internal data logger, quickly access, download or delete your project data
- Ability to download files from the device via USB drive
- Light weight and easy to use, 24 hours of portable operation.
- Fast, reliable, accurate and repeatable readings in real time, user friendly, cost effective
- Non-Nuclear means no badges, licenses or storage and transport concerns


TECHNICAL SPECIFICATIONS:

MODES

Single: Reading time less than five (5) seconds. Stores Data.

Average: Averages five (5) readings and stores data including date and time. Stores thousands of records.

Continuous: Instantaneous density readings.

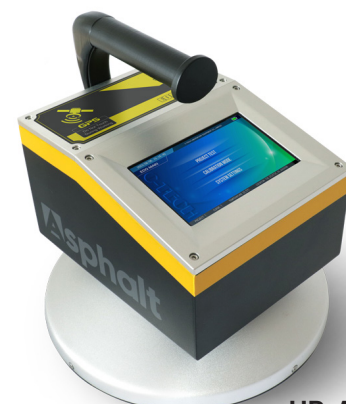

HR-AS0980



HR-AS0980

FUNCTIONS

Density: % Compaction

Integrated Temperature Sensing: Real time temperature display 0 °C to 350 °C

CALIBRATION MODES

Normal: Correlation offset to cores.

MEASUREMENT SPECIFICATIONS:

Sensing Area: 11 in. (27.9cm) diameter base allows optimum measurement on fine and coarse material types.

Measurement Depth: 110 mm

Measurement Display: Density, % Compaction, Surface Temperature, Mix Name & Project Name

ELECTRICAL SPECIFICATIONS:

Microprocessor Controlled

Battery: 2.5 Amp-hr NiMH, 12V

Recharge Time: 4 hours

Battery charger: 12V Universal AC charge

Computer Ports: 1 USB Port

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|-----------------------------------|-----------------|-------------|
| HR-AS0980 | Non-Nuclear Asphalt Density Gauge | 49x22x39 | 9 |

NON-NUCLEAR ASPHALT DENSITY GAUGE, TOUCH SCREEN

STANDARDS: ASTM D 7113-05, AASHTO T 343-12

OPERATIONAL FEATURES:

Status Bar: Displays GPS status, Data Save status, battery voltage, low battery and date and time

Project Details: Stores up to 10 projects with details

Mix Details: Stores up to 20 mixes, details include (MTD, Mix Name, Stone Size, Depth Offset, Operator Name)

Data Logging: When enabled, stores all measurements taken in single or average modes (Status Bar Icon)

Reports: Easily download data to be imported into Excel

GPS Control: When activated will display latitude and longitude positions, number of satellites the gauge is connected to as well as the UTC date and time, also available in UTM format. GPS information will store with each measurement when Data Save and GPS feature is enabled (Status Bar Icon)

Update Software: One touch upload of new software using a USB memory stick

Data Management: Quickly Access, download or delete your project data

Set Time & Date: Quick time and date setup, MM/DD/YY and DD/MM/YY formats



HR-AS0985

HİRA TESTING EQUIPMENT



Units: Interchangeable settings for Density (kg/m³, lb/ft³), Temp (°C, °F), Depth (in, mm) and Stone Size (in, mm)

Enhanced Customer Support: Diagnostic screen to aid in factory Support

User Programmable Target Density: Used for calculating % compaction

GENERAL FEATURES:

- Full color graphics driven user interface, touch screen operation, easy to use.
- New status bar feature, displays GPS status, data save status, available battery voltage, low battery status and date and time
- New data management feature, quickly access, download or delete your project data
- Ability to download files from the device via USB drive
- Fast, reliable, accurate material density and compaction test, and repeatable readings in real time, user friendly, cost effective
- No other method of calibration is required, and on-site testing can be performed directly. You can read the data accurately in three seconds, with higher precision and better stability.
- Non-Nuclear means no badges, licenses or storage and transport concerns

TECHNICAL SPECIFICATIONS:

MODES

Single: Reading time less than five (5) seconds. Stores Data.

Average: Averages five (5) readings and stores data including date and time. Stores thousands of records.

Continuous: Instantaneous density readings.

FUNCTIONS

Density: % Compaction

Porosity: %

Integrated Temperature Sensing: Real time temperature display 0 °C to 350 °C

CALIBRATION MODES

Normal: Correlation offset to cores.

MEASUREMENT SPECIFICATIONS:

Sensing Area: 11 in. (27.9cm) diameter base allows optimum measurement on fine and coarse material types.

Measurement Depth: 110 mm

Measurement Display: Density, % Compaction, Surface Temperature, Mix Name & Project Name

ELECTRICAL SPECIFICATIONS:

Microprocessor Controlled

Battery: 2.5 Amp-hr NiMH, 12V

Recharge Time: 4 hours

Battery charger: 12V Universal AC charge

Computer Ports: 1 USB Port

Technical Specifications:

| Product Code | Product Name | Dimensions (cm) | Weight (kg) |
|--------------|---|-----------------|-------------|
| HR-AS0985 | Non-Nuclear Asphalt Density Gauge, Touch screen | 49x22x39 | 9 |

